

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 20A 24A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ

Wire range: 26-12AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C

Torque: 0.5Nm

MATERIAL



Housing: PA66, UL94V-0

Screws: M3.0 Steel Zn plated

Pin header: Copper alloy Sn plated

ORDER INFORMATION

5	T	S	5	0	0	S	-	3	2	B	N	X	X	X	L	X	-	0	1
Series No.								No of Pins total (04~48P)				E:Green			A:Tray B:Bag				

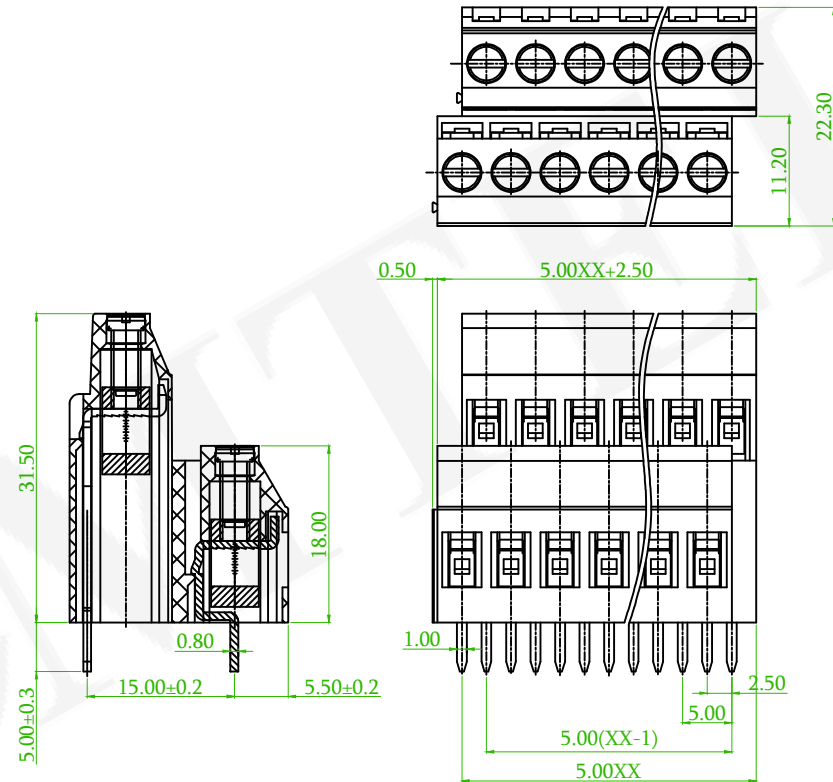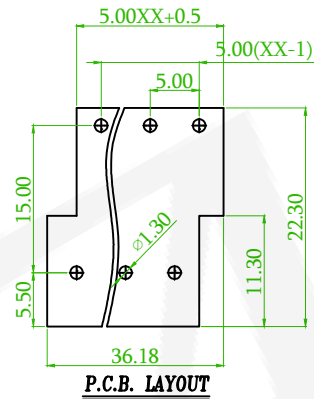

AMTEK 耀德
 2023.11.02
 Released DCC

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 500	to 10	over 10 to 100	over 100 to 500
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:230714 Revise the PART NO.	Benson	2022/09/23
△x1	ECN NO:220814 Revise the PART NO.	Tim	2022/09/16
△x2	ECN NO:201214 Revise the PART NO.	Alice	2020/12/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
 耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	5.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TS500S-32BNXXXLX-01			繪圖 DRAWN	Eric 2018/11/21	
圖號 DRAWING NO.	GN011-EA063			版本 REV.	E	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE				單位 UNIT	mm	THIRD ANGLE PROJECTION

