

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 17.5A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ

Wire range: 30-14AWG 1.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C

Strip length: 6-7mm

Torque: 0.4Nm

MATERIAL

Housing: PA66, UL94V-0

Screws: M2.5 Steel Zn plated

Pin header: Brass, Tin plated

Cage: Brass, Ni plated

ORDER INFORMATION

5 T S 5 0 8 N -

E 3 B N X X

E L X - 0 1

Series No.

No of Pins total
(06~72P)

E:Green


A:Tray
B:Bag






AMTEK 糧德

2022.09.30

Released DCC

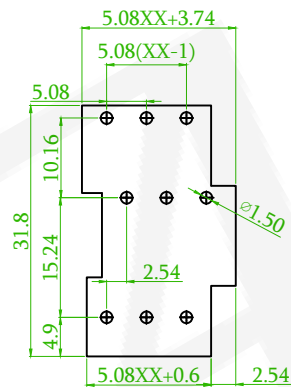

P.C.B. LAYOUT

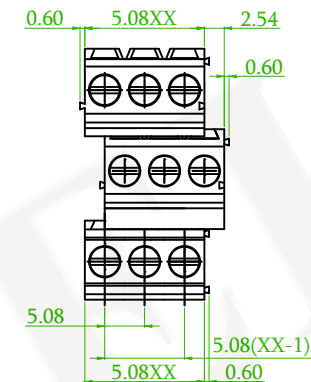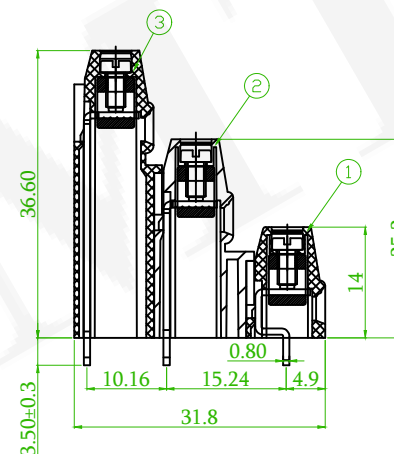

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	
△x1	ECN NO:220814 Revise the PART NO.							Tim	2022/09/16	
△x1	ECN NO:200718 Revise the Tolerance							Alice	2020/12/08	



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS508N-E3BNXXELX-01				繪圖 DRAWN	Eric 2018/11/23
圖號 DRAWING NO.	GN011-EA084	版本 REV.	C	核對 CHECKED	Josh 2018/11/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/23	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		