


ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 25A 20A
Wire Range: 24~12AWG 2.5mm²
Dielectric Voltage: AC 2000V for one minute

ORDER INFORMATION


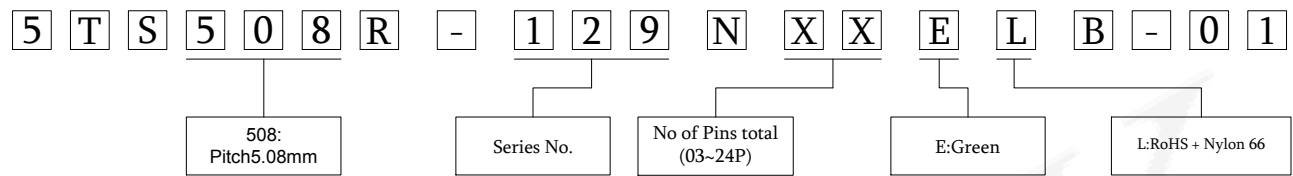


MECHANICAL

Torque: 0.5Nm
Strip Length: 6~7mm
Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: Nylon 66, UL94V-0
Screws: M3, Steel, Zn Plated
Pin Header: Brass, Tin Plated
Wire Guard: Brass, Ni Plated

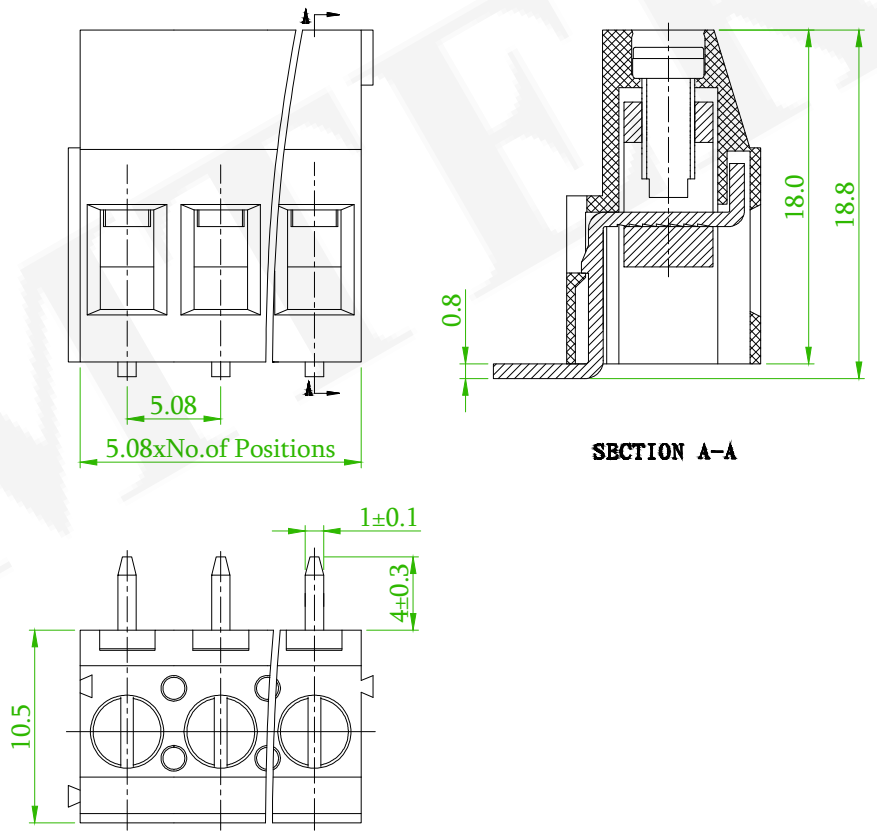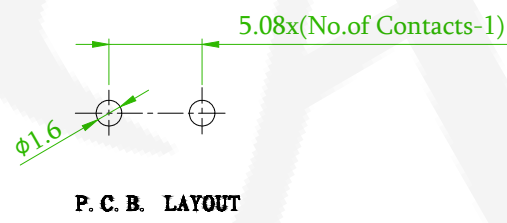

linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
ECN NO: 200718 Revise the Tolerance								Alice	2020/12/08	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

Old Part No. : TB129R-5.08-XXP-1X-00A-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Terminal Block				頁數 Page	1/1
	品號 PART NO.	5TS508R-129NXXELB-01				繪圖 DRAWN	Roy 2017/08/31
	圖號 DRAWING NO.	GN011-RL969	版本 REV.	B	核對 CHECKED	Carol 2017/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/08/31	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		