
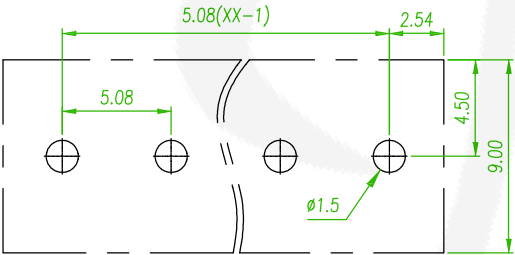


Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 16A 18A
Withstanding Voltage: AC 1600V for one min
Wire range:22~12AWG 0.2~2.5mm²
Impulse withstand Voltage: 4.0KV


Mechanical
Temp. Range: -40°C ~ +105°C
Torque(Max):0.4Nm(3.6Lb.in)
Stripping Length:6-7mm

Material
Housing: PA66, UL94V-0
Screws:M2.5
Contact Pin:Copper alloy Sn plated


ORDER INFORMATION

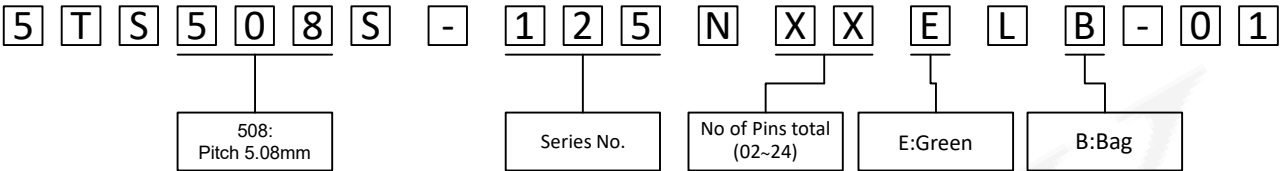

P.C.B. LAYOUT

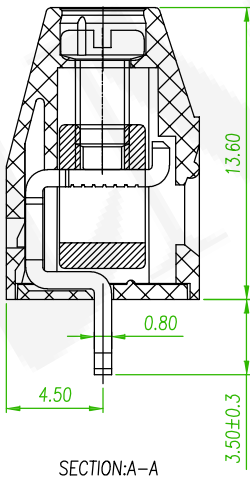

SECTION:A-A

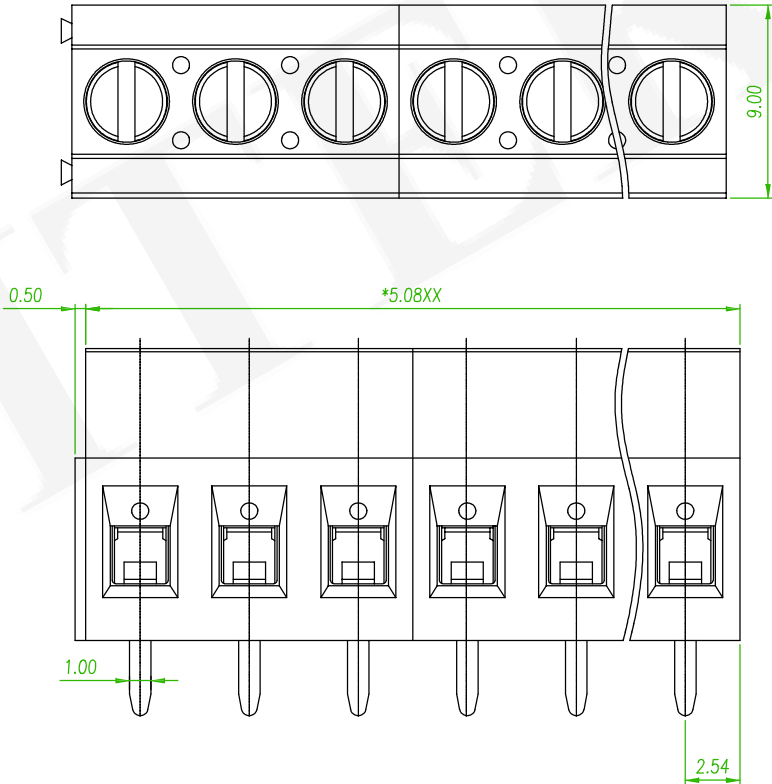

linear dimension(Tolerances Standard GB/T 14486-2008)										—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000	to 10	to 100	to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Terminal Block				頁數 Page	1/1
	品號 PART NO.	5TS508S-125NXXELB-01				繪圖 DRAWN	David 2020/02/24
	圖號 DRAWING NO.	GN011-DV834	版本 REV.	A	核對 CHECKED	Josh 2020/02/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/02/24	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		