

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 20A 24A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ

Wire range: 24-12AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C

Strip length: 12-13mm

Torque: 0.4Nm

MATERIAL

Housing: PA66, UL94V-0

Screws: M2.5 Steel Zn plated

Pin header: Copper alloy, Sn plated

Cage: Steel Ni plated

Slide block: Steel Zn plated

ORDER INFORMATION


5 T S 7 5 0 S - 1 5 A N X X E L X - 0 1

Series No.




Poles
(02-30P)

E:Green

A:Tray
B:Bag



P.C.B. LAYOUT

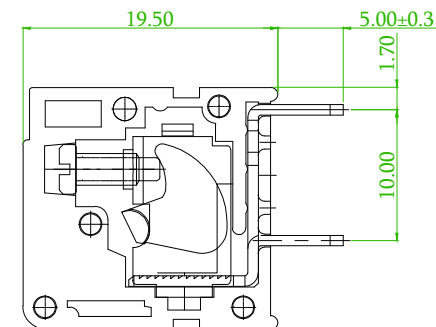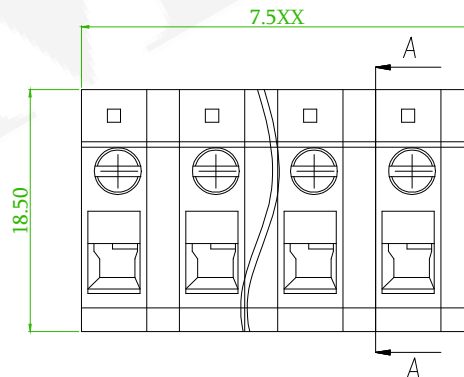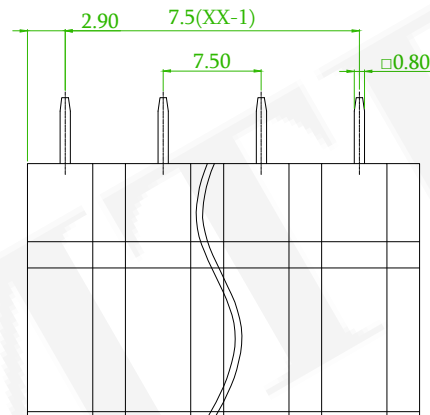

SECTION:A-A

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△x1

ECN NO:200718 Revise the Tolerance

Alice

2020/12/10

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

品號
PART NO.

圖號
DRAWING NO.

客戶品號
CUSTOMER P/N

公差
TOLERANCE

7.5mm Terminal Block

5TS750S-15ANXXELX-01

GN011-EA090

版本
REV.

B

比例
SCALE

單位
UNIT

繪圖
DRAWN

核對
CHECKED

承認
APPROVED

THIRD
ANGLE
PROJECTION

頁數
Page

Eric

Josh

Jason

2018/11/26

1/1