


ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 30A 32A
Contact Resistance:20mΩ
Insulation Resistance:500MΩ/DC500V
Wire Rang:26~10AWG 4mm²
Dielectric Voltage: AC 2000V for one minute

ORDER INFORMATION



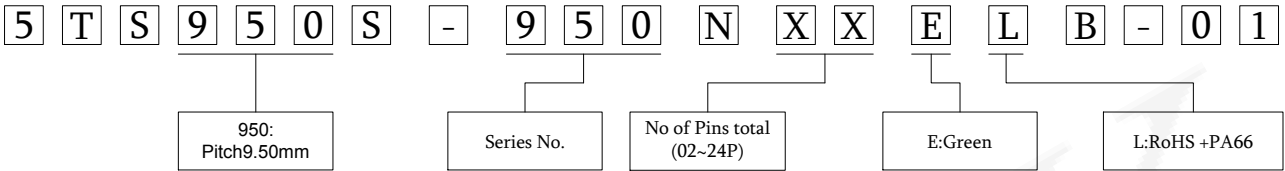


MECHANICAL


Temp.Range:-40°C~+105°C
Torque:0.5Nm
Max Soldering:+250°C , for 5 Sec
Strip Length:6-7mm

MATERIAL

Insulator: PA66, UL94V-0
Screws:M3.0 Steel Zn Plated
Pin header:Brass,Tin Plated
Cage:Brass,Ni Plated

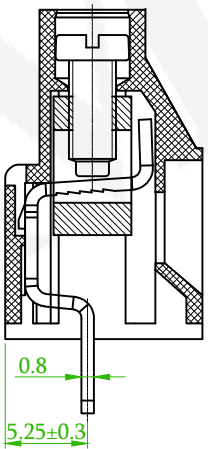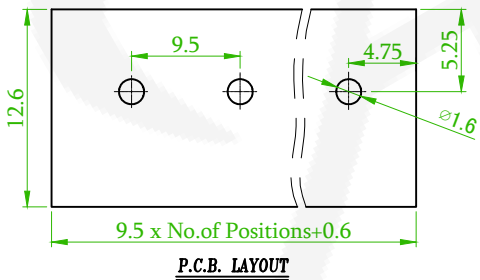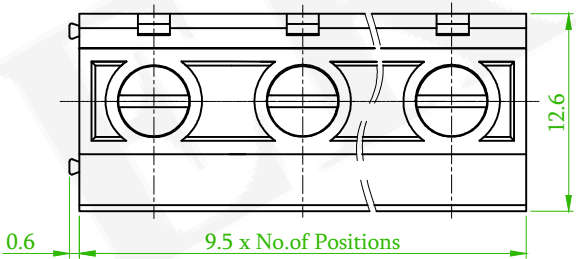

SECTION A-A

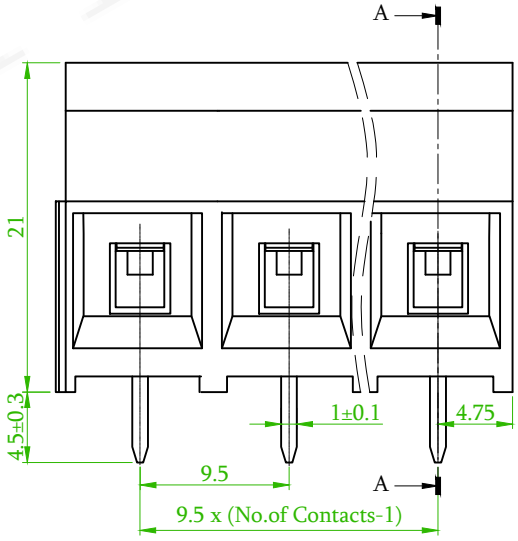

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/12/10



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS950S-950NXXELB-01				繪圖 DRAWN	Mia 2017/09/20
圖號 DRAWING NO.	GN011-MC656	版本 REV.	B	核對 CHECKED	Jason 2017/09/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/09/20	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		