

SPECIFICATIONS

Current Rating: 0.7A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute

MATERIAL

Pin Material: Phosphor Bronze
Shell: Phosphor Bronze/Tin-plated
Material: LCP,UL94V-0






ORDER INFORMATION

5	W	0	5	0	5	H	0	-	1	X	X	G	0	B	H	U	A	0	1
Pitch 0.50mm					1:Single Row		No. of contacts per row		G0:Gold Flash		B:Black		H:T/R W/O Cap		RoHS				



Amtek
2017.08.29
文管中心

Circuit No.	Dimensions				
	A	B	C	D	E
41P	20.00	26.00	30.35	32.85	4.00
51P	25.00	31.00	35.35	37.85	5.00

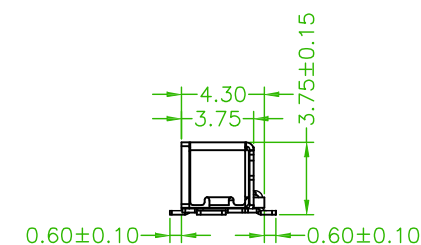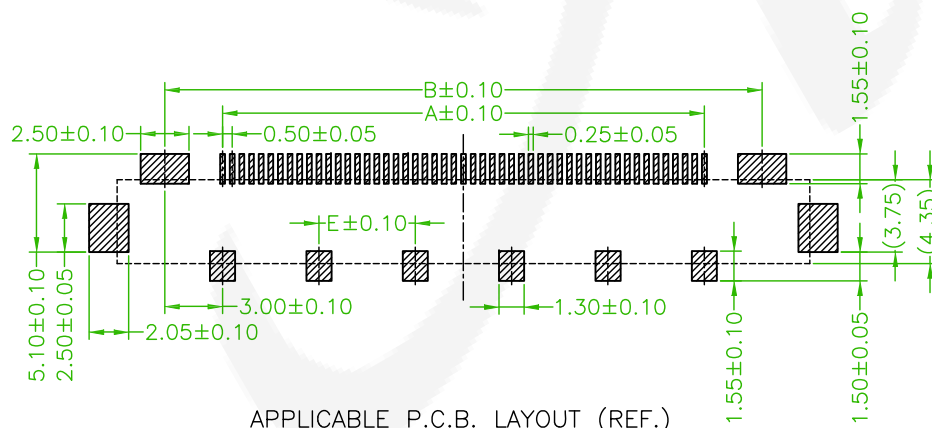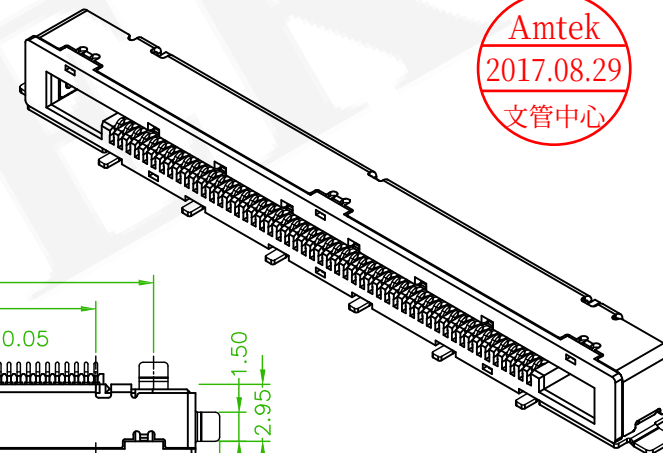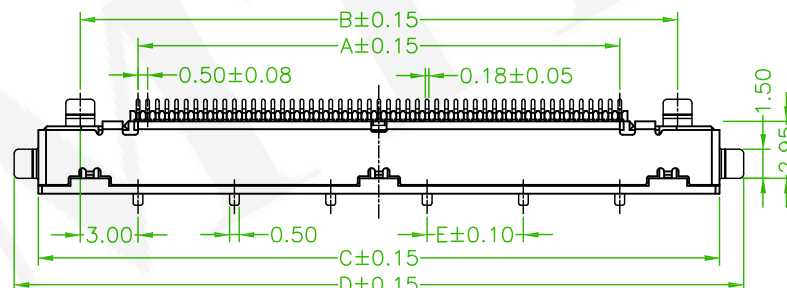

Old Part No.:0505MR-XXGB-U

APPLICABLE P.C.B. LAYOUT (REF.)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	0.50mm WAFER SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	5W0505H0-1XXG0BHUA01				繪圖 DRAWN	Eloise 2016/11/29
圖號 DRAWING NO.	GW090-EL005	版本 REV.	A	核對 CHECKED	Jonny 2016/11/29	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/29	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		