





SPECIFICATIONS

Current Rating: 0.5A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 200V AC/minute



MATERIAL

Contact: Phosphor Bronze
Material: Nylon 46,UL94V-0
Applicable Wire :AWG#32
Insulation O.D: 0.38mm

ORDER INFORMATION

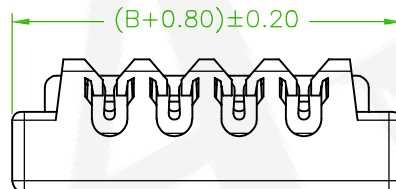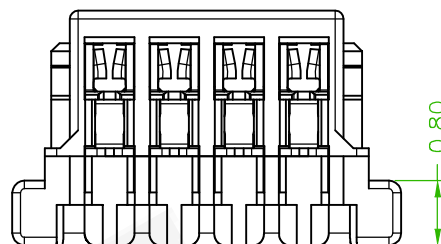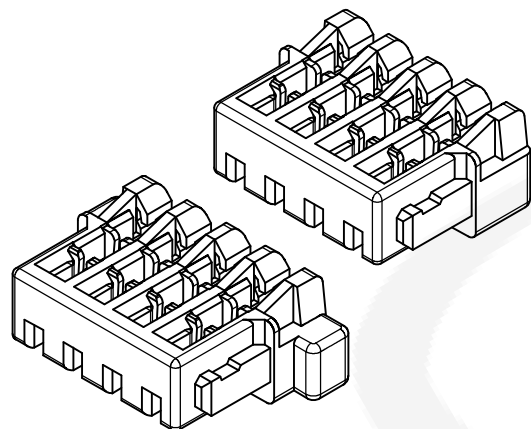
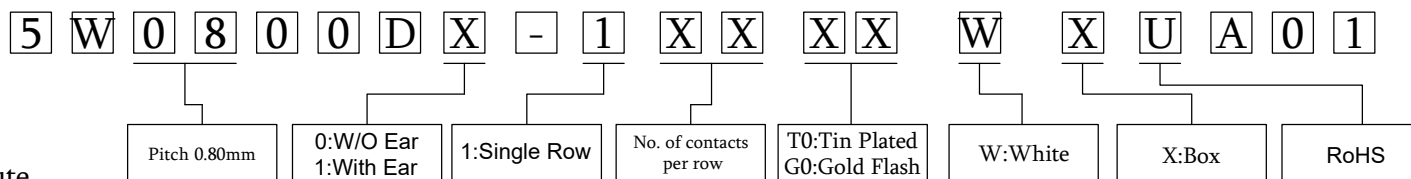


1:With Ear

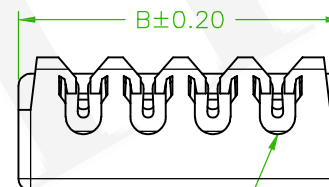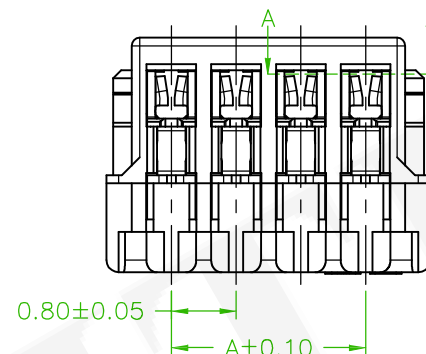

Circuit 1

0:W/O Ear

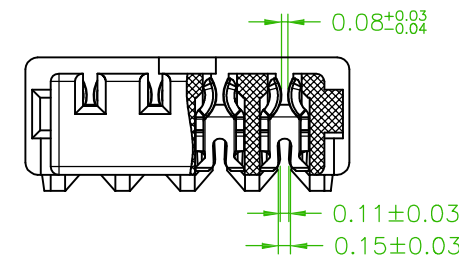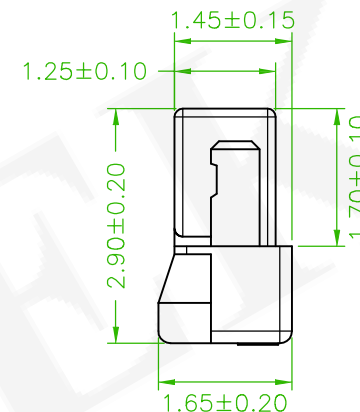

SECTION A-A

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	0.80	2.40	10P	7.20	8.80
03P	1.60	3.20	11P	8.00	9.60
04P	2.40	4.00	12P	8.80	10.40
05P	3.20	4.80	14P	10.40	12.00
06P	4.00	5.60	15P	11.20	12.80
07P	4.80	6.40	16P	12.00	13.60
08P	5.60	7.20	17P	12.80	14.40
09P	6.40	8.00	20P	15.20	16.80

Old Part No.:0800IDC-XXTW-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	0.8mm HOUSING IDC TYPE				頁數 Page	1/1
	品號 PART NO.	5W0800DX-1XXXXWXUA01				繪圖 DRAWN	Eloise 2016/11/28
	圖號 DRAWING NO.	GW090-JF050				核對 CHECKED	Jonny 2016/11/28
	客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2016/11/28
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15				單位 UNIT	mm
						THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE