

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C to +85°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min


Withstanding Voltage: 500V AC/minute

Material:Nylon 6T,UL94V-0


ORDER INFORMATION

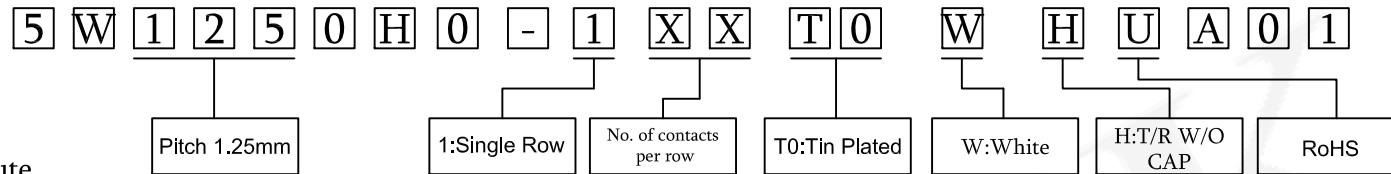

Part No.	Dimensions	
	A	B
5W1250H0-102T0WHUA01	1.25	7.75
5W1250H0-103T0WHUA01	2.50	9.00
5W1250H0-104T0WHUA01	3.75	10.25
5W1250H0-105T0WHUA01	5.00	11.50
5W1250H0-106T0WHUA01	6.25	12.75
5W1250H0-107T0WHUA01	7.50	14.00
5W1250H0-108T0WHUA01	8.75	15.25
5W1250H0-109T0WHUA01	10.00	16.50
5W1250H0-110T0WHUA01	11.25	17.75
5W1250H0-111T0WHUA01	12.50	19.00
5W1250H0-112T0WHUA01	13.75	20.25
5W1250H0-113T0WHUA01	15.00	21.50
5W1250H0-114T0WHUA01	16.25	22.75
5W1250H0-115T0WHUA01	17.50	24.00

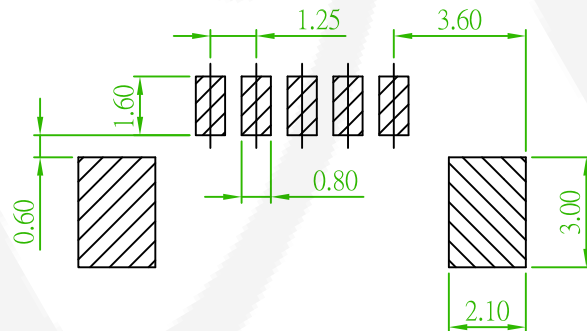

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

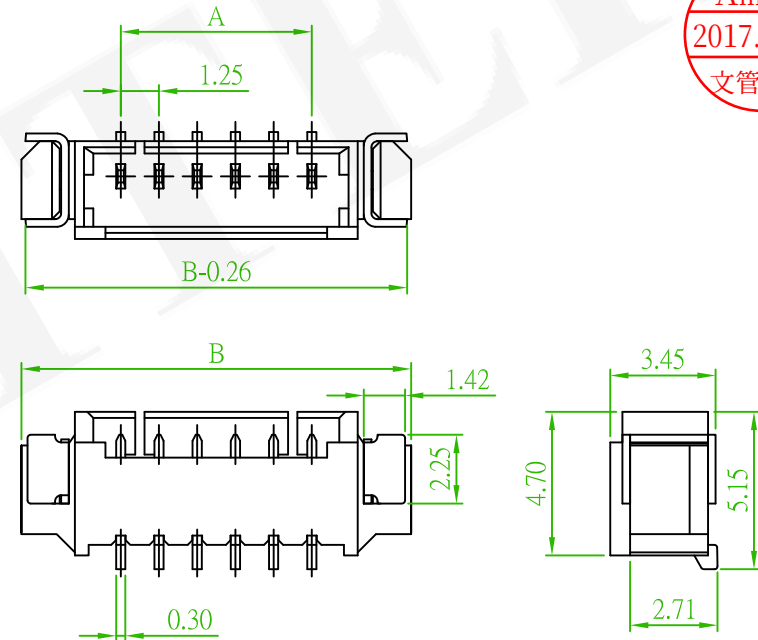

Old Part No.:1250MR-XXTW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER SMT RIGHT ANGLE			頁數 Page	1/1
	品號 PART NO.	5W1250H0-1XXT0WHUA01			繪圖 DRAWN	Mia 2015/09/04
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/04
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	.X° $\pm 1^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION