






SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 1000V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Material:Nylon 6T,UL94V-0

ORDER INFORMATION

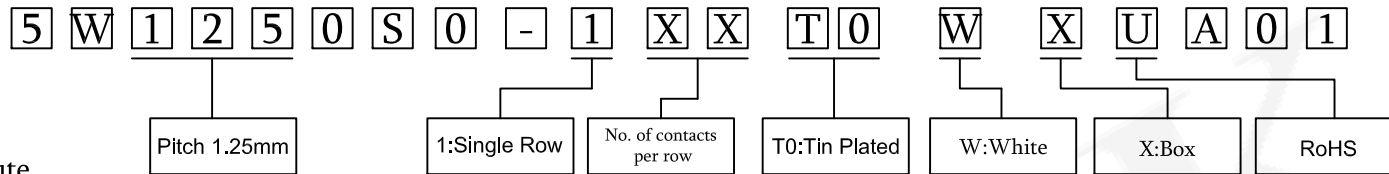

No. of contacts	Dimensions	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

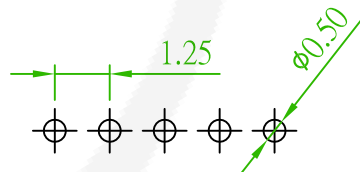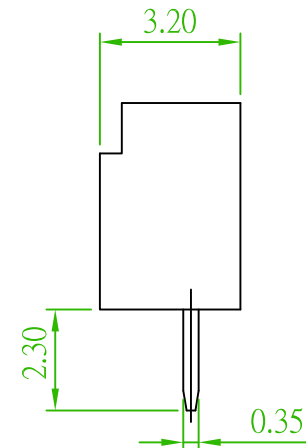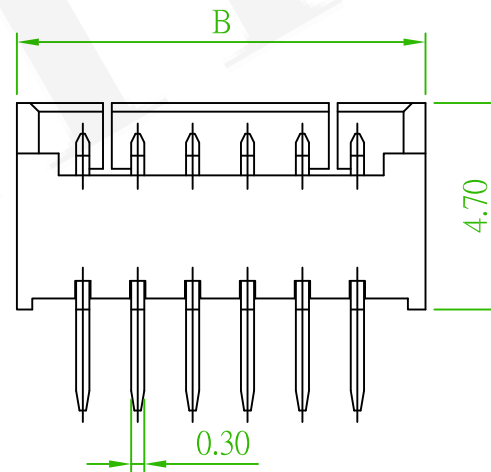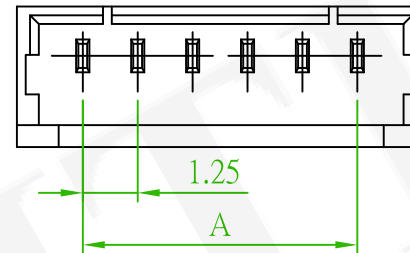

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)



Old Part No.:1250S-XXTW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W1250S0-1XXT0WAUA01				繪圖 DRAWN	Mia 2015/09/04
	圖號 DRAWING NO.	GW090-EL133	版本 REV.	A	核對 CHECKED	John 2015/09/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
	公差 TOLERANCE	.X ± 0.2 .XX ± 0.1	.X° $\pm 1^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION	