


SPECIFICATIONS








Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold-plated
Solder Tabs: Phosphor Bronze/Gold-plated
Material: Nylon 6T,UL94V-0

ORDER INFORMATION

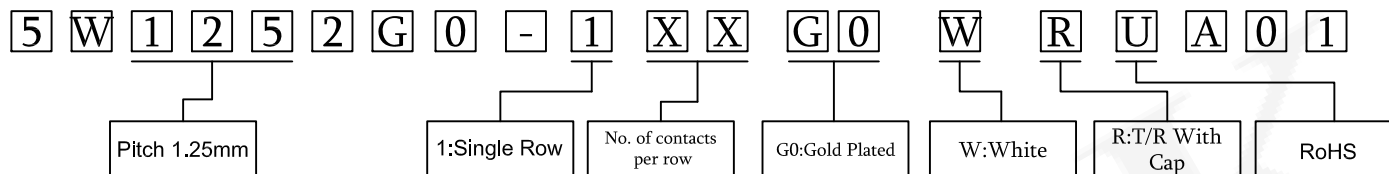

Amtek
2017.08.29
文管中心

No. of contacts	Dimensions				
	A	B	C	D	E
102	1.25	4.15	6.25	3.15	- - -
103	2.50	5.40	7.50	4.40	1.25
104	3.75	6.65	8.75	5.65	2.50
105	5.00	7.90	10.00	6.90	3.75
106	6.25	9.15	11.25	8.15	5.00
107	7.50	10.40	12.50	9.40	6.25
108	8.75	11.65	13.75	10.65	7.50
109	10.00	12.90	15.00	11.90	8.75
110	11.25	14.15	16.25	13.15	10.00
111	12.50	15.40	17.50	14.40	11.25
112	13.75	16.65	18.75	15.65	12.50
113	15.00	17.90	20.00	16.90	13.75
114	16.25	19.15	21.25	18.15	15.00
115	17.50	20.40	22.50	19.40	16.25

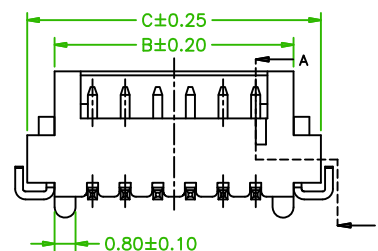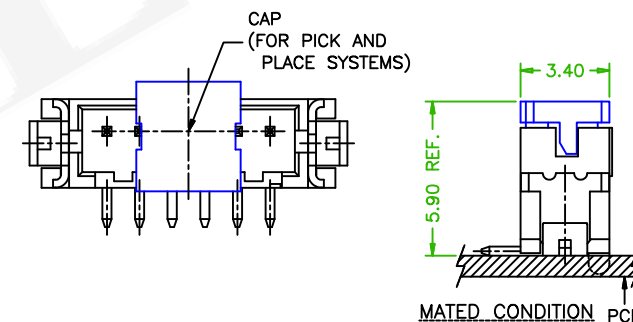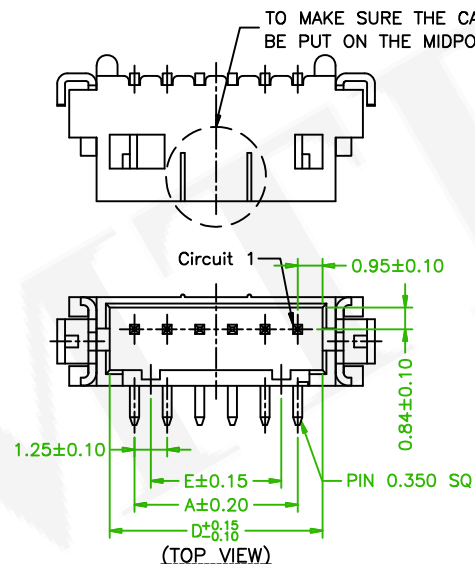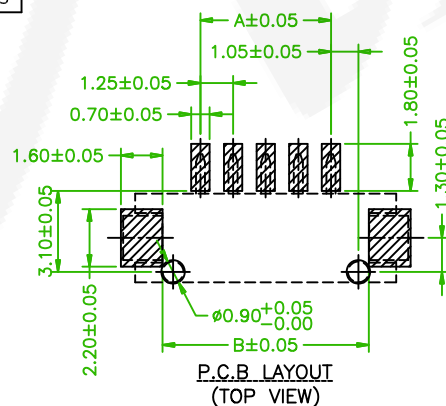

Old Part No.:1252MS-1XXGW-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm Wafer SMT 180°			頁數 Page	1/1
	品號 PART NO.	5W1252G0-1XXG0WRUA01			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE