



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Cap: Nylon 6T,UL94V-0,Natural(Beige)
Wafer: Nylon 6T,UL94V-0
Color: Natural(Beige)




ORDER INFORMATION

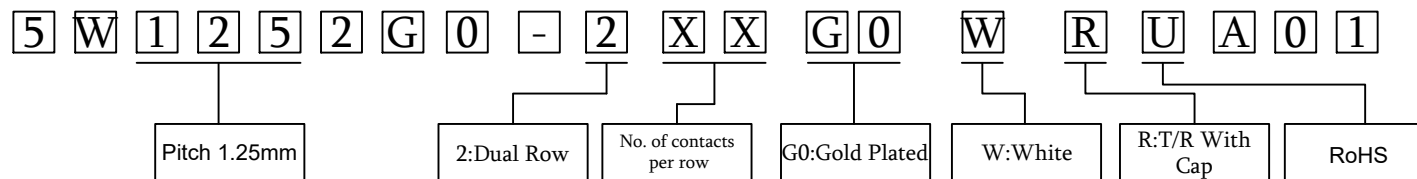

Circuit No.	Dimensions	
	A	B
2X05P	5.00	12.50
2X06P	6.25	13.75
2X07P	7.50	15.00
2X10P	11.25	18.75
2X15P	17.50	25.00
2X17P	20.00	27.50
2X18P	21.25	28.75
2X20P	23.75	31.25
2X21P	25.00	32.50
2X25P	30.00	37.50

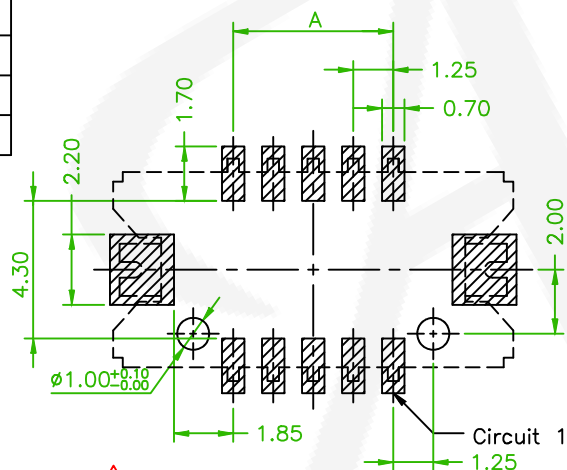

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

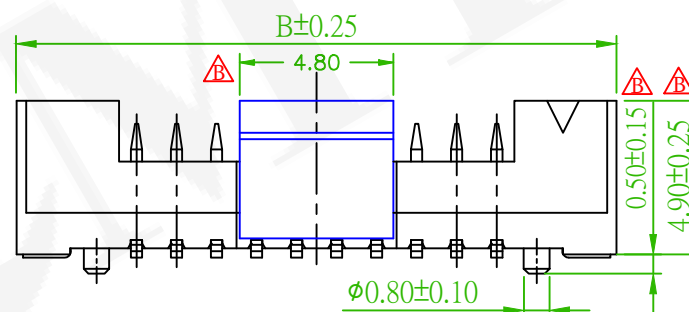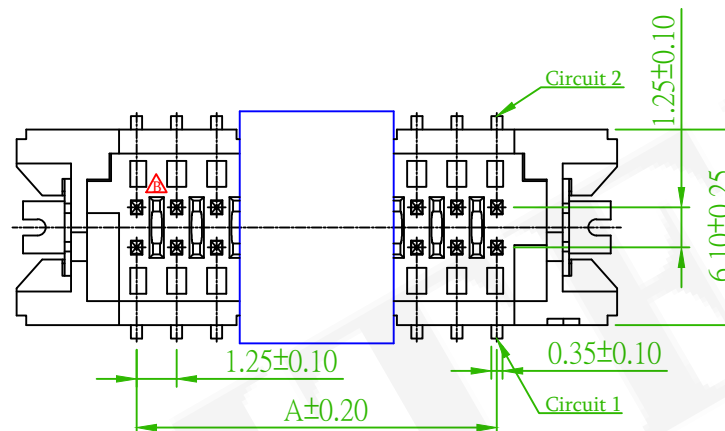

Old Part No.:1252MS-2XXGW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax2	ECN NO.: 220528 Revise the Layout	Alice	2022/06/07
Ax4	ECN NO.: 201006 Revise the drawing	Benson	2020/11/03



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.25mm WAFER SMT				頁數 Page	1/2
品號 PART NO.	5W1252G0-2XXG0WRUA01				繪圖 DRAWN	Kent 2006/12/21
圖號 DRAWING NO.	GW090-BN357				核對 CHECKED	Paul 2006/12/21
客戶品號 CUSTOMER P/N					承認 APPROVED	James 2006/12/21
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° $\pm 1^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION	