


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C~ +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute


MATERIAL

Solder Tabs: Brass/Tin-plated
Material:Nylon 66,UL94V-0

ORDER INFORMATION

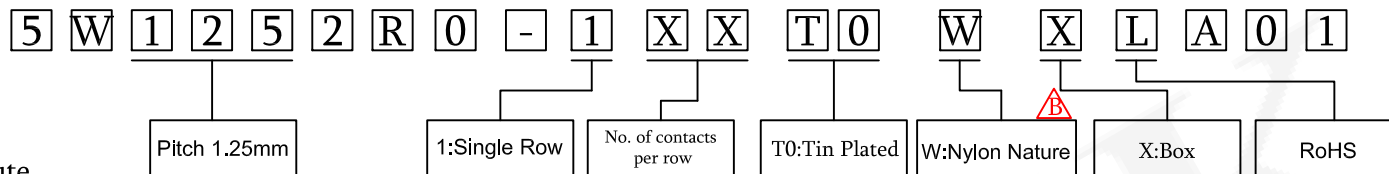

PART NO.	Dimensions	
	A	B
02	1.25	3.75
03	2.50	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

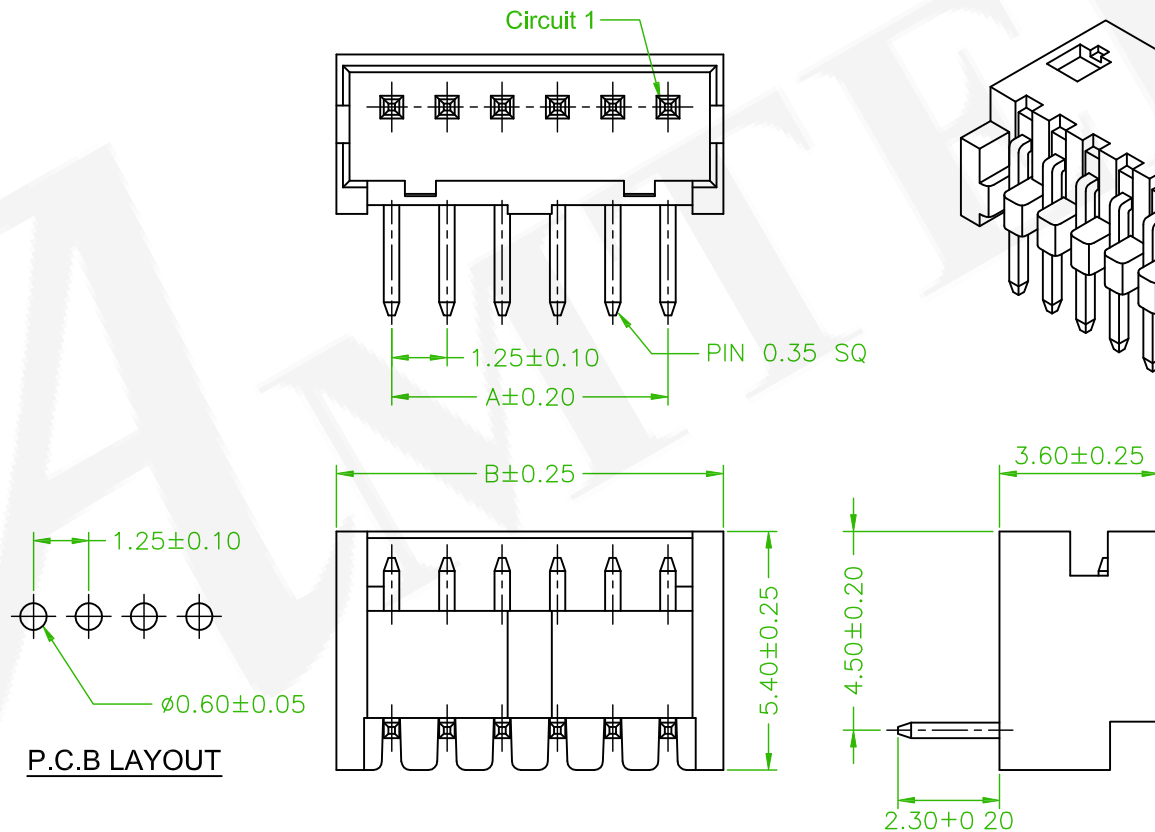

Old Part No.:1252R-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax1	ECN No.:170908, Revised the Color	Killin	2017/09/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W1252R0-1XXT0WXLA01				繪圖 DRAWN	Eloise 2016/11/30
	圖號 DRAWING NO.	GW090-EL008	版本 REV.	B	核對 CHECKED	Jonny 2016/11/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/30	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		