





Specifications

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Terminal: Copper Alloy/Gold Plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)



ORDER INFORMATION

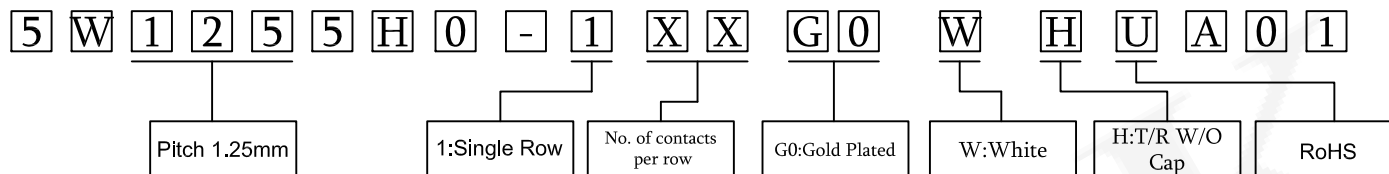

No. of contacts	Dimensions		
	A	B	C
102	1.25	6.10	4.01
103	2.50	7.35	5.26
104	3.75	8.60	6.51
105	5.00	9.85	7.76
106	6.25	11.10	9.01
107	7.50	12.35	10.26
108	8.75	13.60	11.51
110	11.25	16.10	14.01
111	12.50	17.35	15.26
112	13.75	18.60	16.51
113	15.00	19.85	17.76
114	16.25	21.10	19.01
115	17.50	22.35	20.26
120	23.75	28.60	26.51
125	30.00	34.85	32.76
130	36.25	41.10	39.01

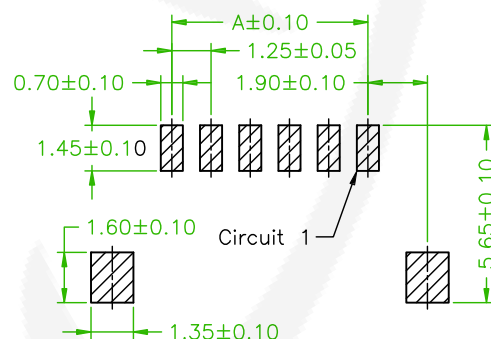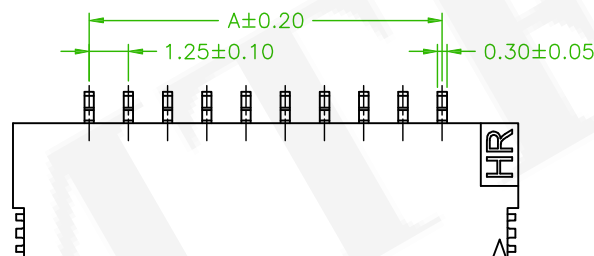

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

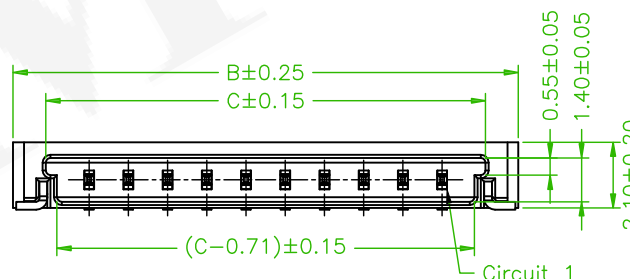

Old Part No.:1255MR-XXGW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER SMT R/A				頁數 Page	1/1
	品號 PART NO.	5W1255H0-1XXG0WHUA01				繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		
						2016/10/18	