

Specifications

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 40mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

MATERIAL

Terminal: Phosphor Bronze

Insulator: Nylon 6T,UL94V-0


ORDER INFORMATION

5	W	1	2	5	6	G	X	-	1	X	X	X	X	X	X	U	A	0	1
Pitch 1.25mm			0:W/O POST 1:WITH POST		1:Single Row		No. of contacts per row		G3:Au 3u"		B:Black Insulator		R:T/R With CAP		RoHS				







Ordering Information & Dimensions

No. of contacts	Dimensions		
	A	B	C
31	18.75	23.10	17.50

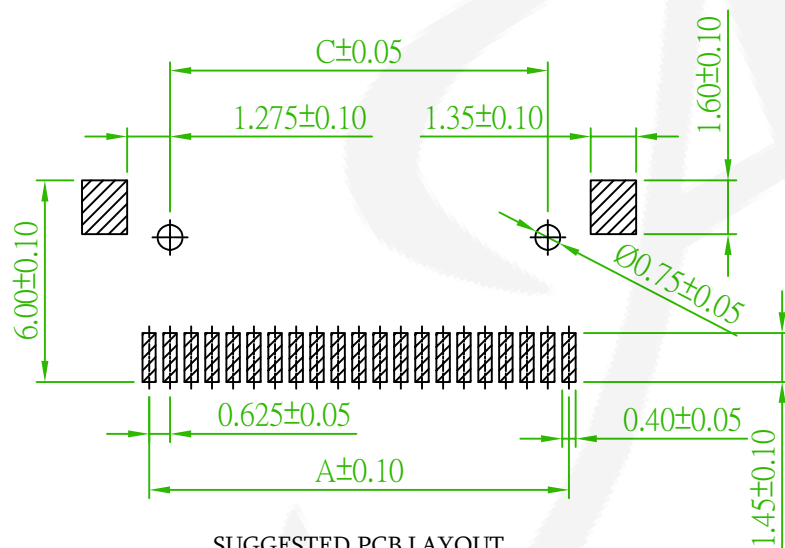

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

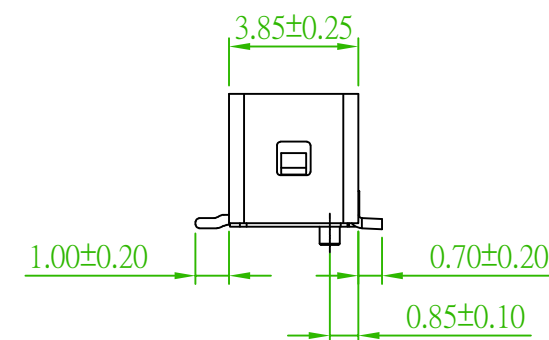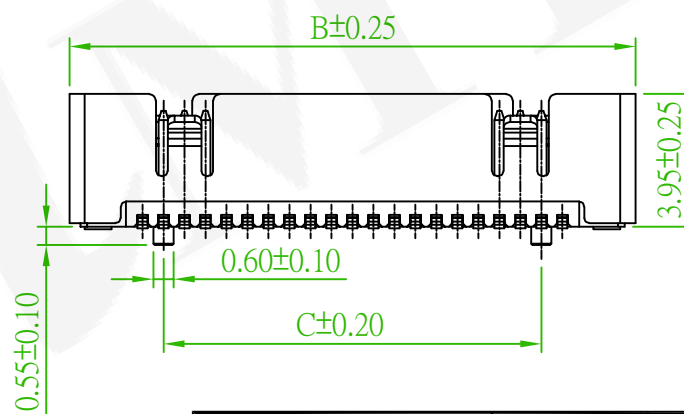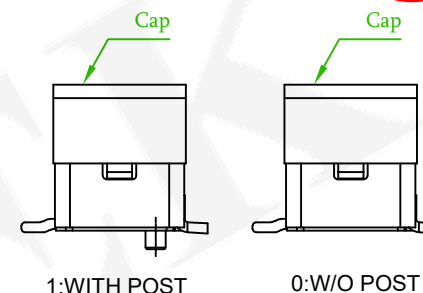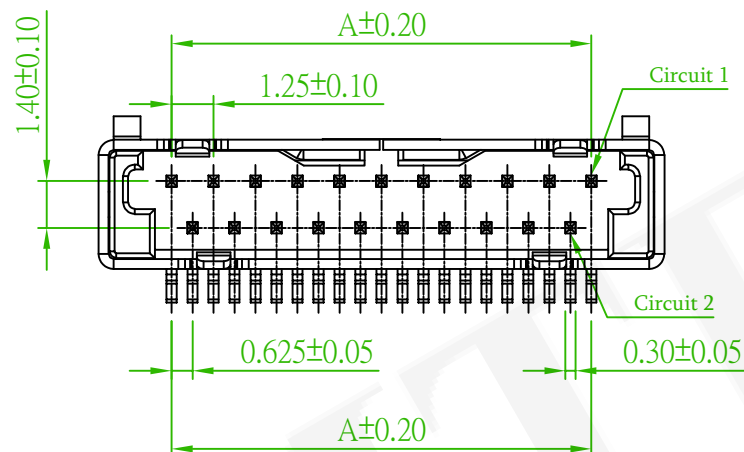

Old Part No.:1256MS-XXGB1-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER SMT TYPE				頁數 Page	1/1
	品號 PART NO.	5W1256GX-1XXXXXXUA01				繪圖 DRAWN	Volvo 2007/08/02
	圖號 DRAWING NO.	GW090-RE246		版本 REV.	C	核對 CHECKED	Paul 2007/08/02
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2007/08/02
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x1	QEC NO.230705:Revise the Drawing	Alice	2023/07/20
△x3	ECN NO.230415:Revise the Drawing	Rex	2023/05/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE