

SPECIFICATIONS

Current Rating: 1A AC,DC

Insulation Resistance: 100M Ω Min.

Contact Resistance: 40m Ω Max.

Dielectric Voltage: 500V AC/minute

Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: Nylon 6T,UL94V-0

Contact: Phosphor Bronze

ORDER INFORMATION

5 W 1 2 5 6 H 0 - 1 X X X X X U A 0 1

Pitch 1.25mm

1:Single Row

No. of contacts
per row

G3:Au 3u"

B:Black

H:T/R W/O Cap

RoHS








AMTEK 耀德

2023.05.09

Released DCC

PIN	Dimensions	
	A	B
21P	12.50	16.55
31P	18.75	22.80
41P	25.00	29.05

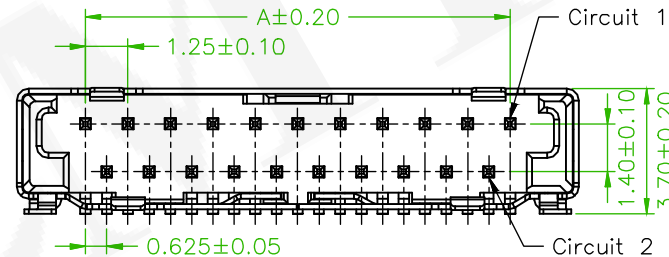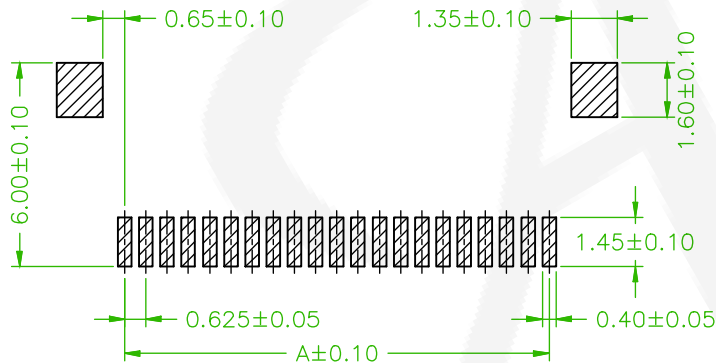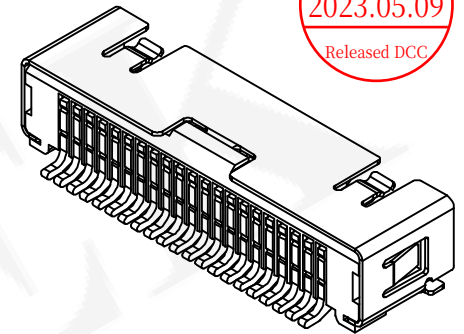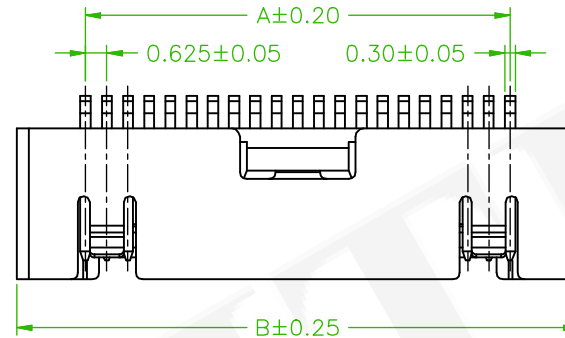

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No.:1256MR-XXGB-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A3	ECN NO.230415:Revise the Drawing	Rex	2023/05/05


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.25mm WAFER SMT RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	5W1256H0-1XXXXXXUA01				繪圖 DRAWN	Roy 2016/09/08
圖號 DRAWING NO.	GW090-RE247	版本 REV.	B	核對 CHECKED	Jonny 2016/09/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		