

SPECIFICATIONS

Current Rating: 1.2A AC,DC

Temperature Range: -40°C to +105°C

Contact Resistance: 20mΩ Max

Withstanding Voltage: 500V AC/minute

Insulation Resistance:1000mΩ Min

Contact Material:Phosphor Bronze

Insulator Material:PBT+30%G.F,UL94V-0

ORDER INFORMATION

5 W 1 2 7 1 D F - 1 X X T 0 W T L M 0 1

No. of contacts

T: Tin Plated

W: White





T: Tube W/O Cap

RoHS



No. of Pins	Dimensions	
	A	B
04	3.81	7.59
06	6.35	10.13
08	8.89	12.67
10	11.43	15.21
12	13.97	17.75
14	16.51	20.29
16	19.05	22.83
18	21.59	25.37
20	24.13	27.91
22	26.67	30.45
24	29.21	32.99
26	31.75	35.53

Ribbon Cable
1.27mm Pitch

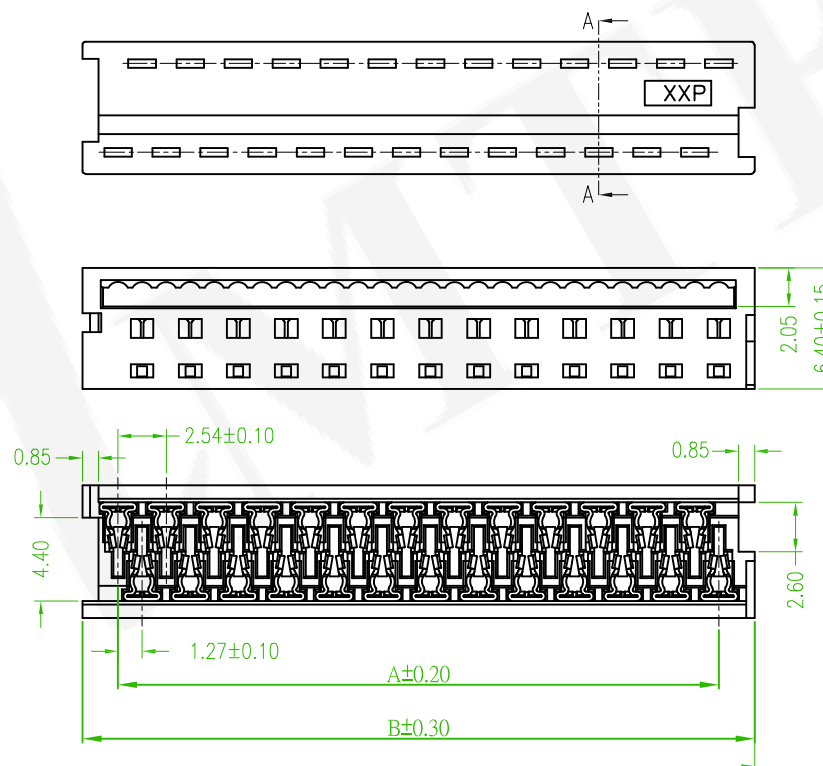

Section A-A

Amtek
2017.08.29
文管中心

Old Part No.:1271IDC-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.27mm Flat IDC Connector				頁數 Page	1/1
品號 PART NO.	5W1271DF-1XXT0WTLM01				繪圖 DRAWN	Jeff 2016/10/28
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/28	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/28	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		