

Current Rating: 2.4A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute

5 W 1 2 7 1 R 0 - 1 X X T 0 B T U M 0 1

Pitch 1.27mm

1:Single Row

No. of contacts per row

T0:Tin Plated

B:Black


T:Tube Without CAP

RoHS





Terminal: Brass
Material: Nylon 6T, UL94V-0

No. of contacts	Dimensions		
	A	B	C
04	8.86	6.11	3.81
06	11.40	8.65	6.35
08	13.94	11.19	8.89
10	16.48	13.73	11.43
12	19.02	16.27	13.97
14	21.56	18.81	16.51
16	24.10	21.35	19.05
18	26.64	23.89	21.59
20	29.18	26.43	24.13
22	31.72	28.97	26.67
24	34.26	31.51	29.21
26	36.80	34.05	31.75

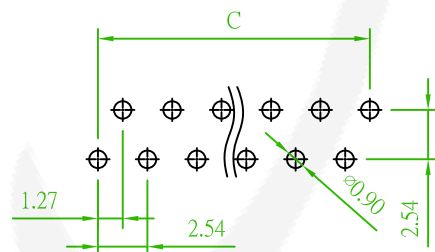

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

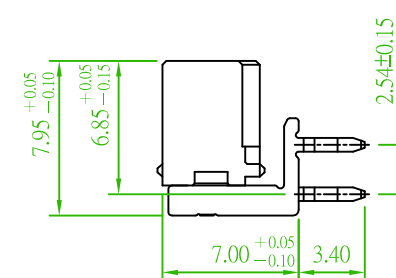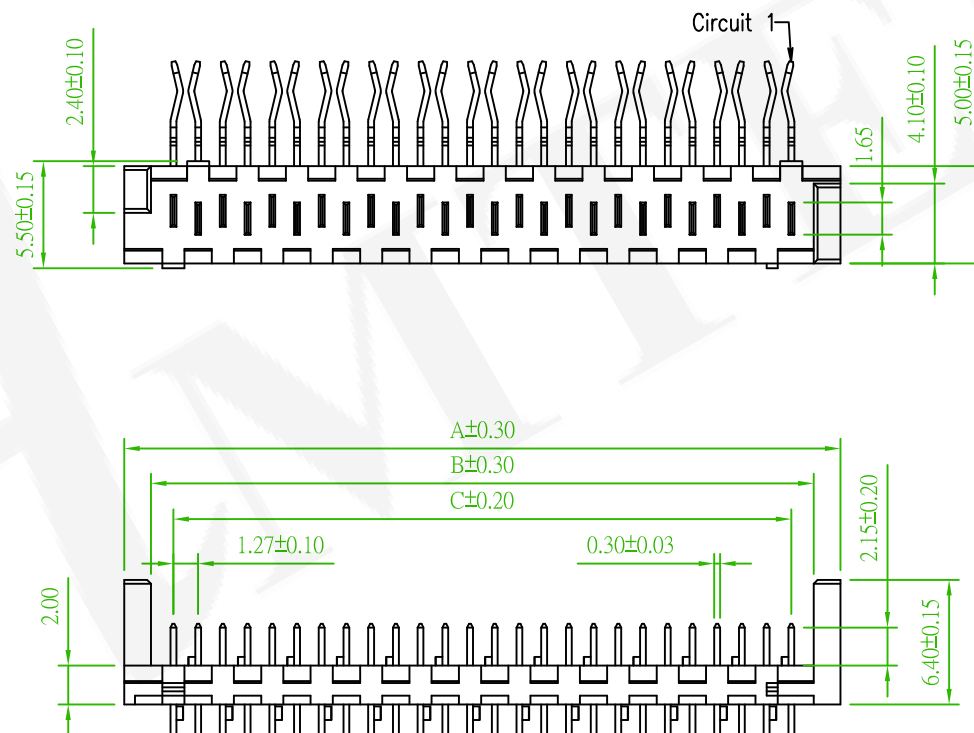

Old Part No.:1271R-XXTB-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.27mm RIGHT ANGLE DIP WAFER				頁數 Page	1/1
品號 PART NO.	5W1271R0-1XXT0BTUM01			繪圖 DRAWN	Joe 2010/09/16	
圖號 DRAWING NO.	GW090-EL059	版本 REV.	A	核對 CHECKED	Sinnys 2010/09/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/09/16	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		