



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Solder Tabs: Brass/Tin-plated
Material:Nylon 6T,UL94V-0




ORDER INFORMATION

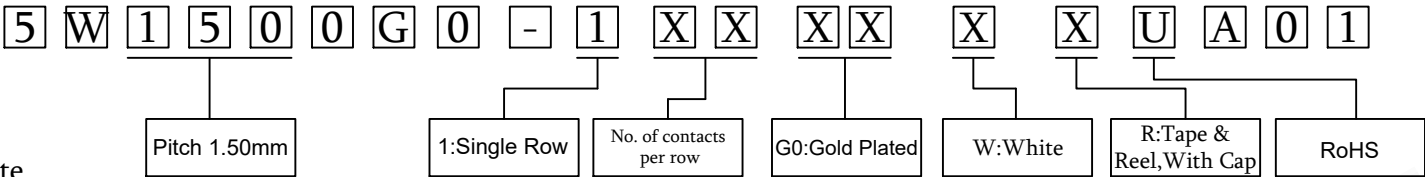

No. of contacts	Dimensions	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50

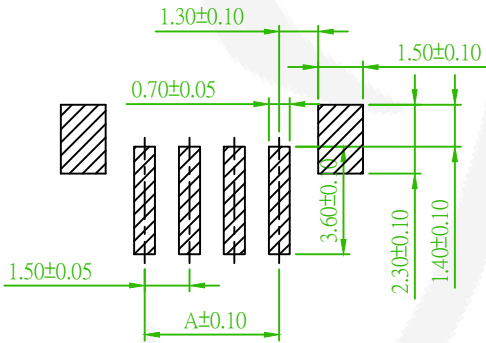

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

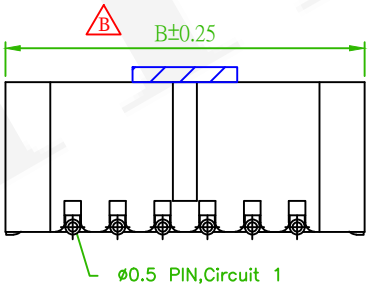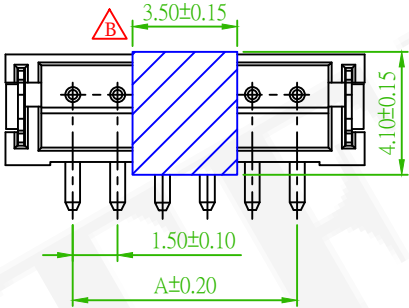

Old Part No.:1500MS-XXGW-U

△	Easy Flow 202402160001	Gaby	2024/02/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER SMT				頁數 Page	1/1
	品號 PART NO.	5W1500G0-1XXXXXXUA01				繪圖 DRAWN	Mia 2015/09/04
	圖號 DRAWING NO.	GW090-AC736	版本 REV.	B	核對 CHECKED	John 2015/09/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
	公差 TOLERANCE	.X ± 0.2 .XX ± 0.1	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	