



SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩMax.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)



ORDER INFORMATION

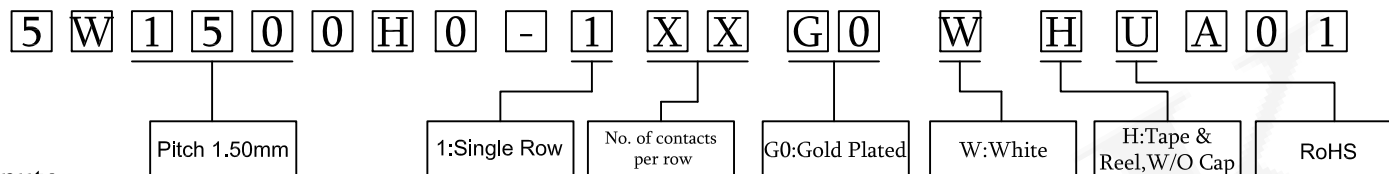

No. of contacts	Dimensions	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50

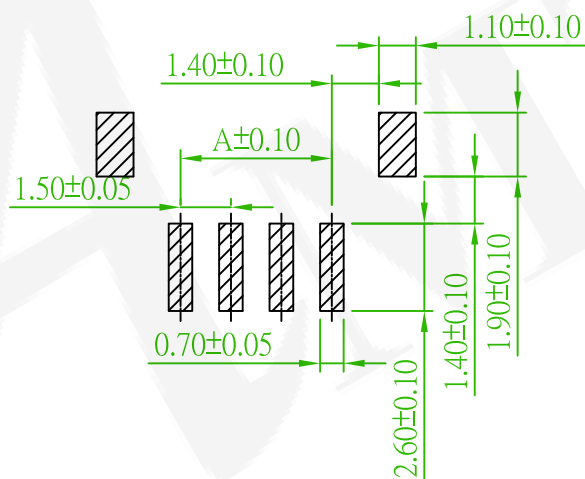

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

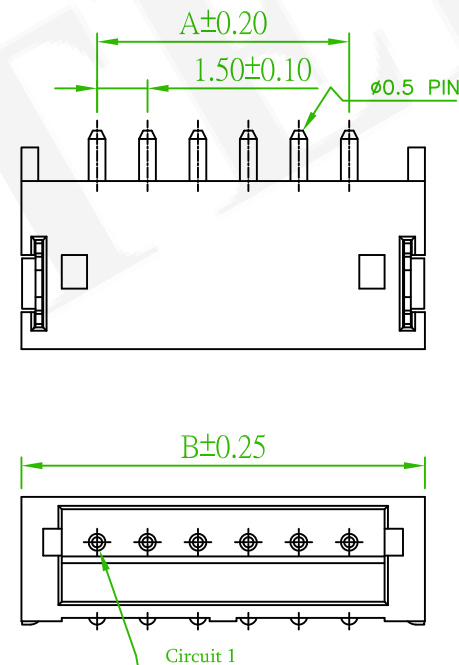


Old Part No.:1500MR-XXGW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER SMT RIGHT ANGLE			頁數 Page	1/2
	品號 PART NO.	5W1500H0-1XXG0WHUA01			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	




2~8 Contacts

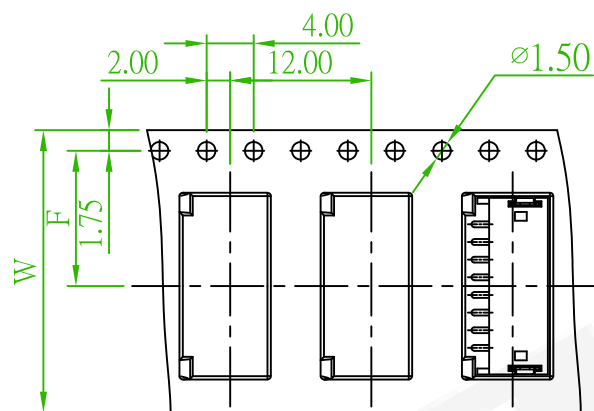

Unreeling direction →



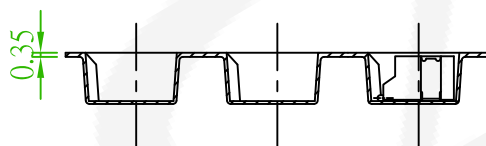


9~13 Contacts

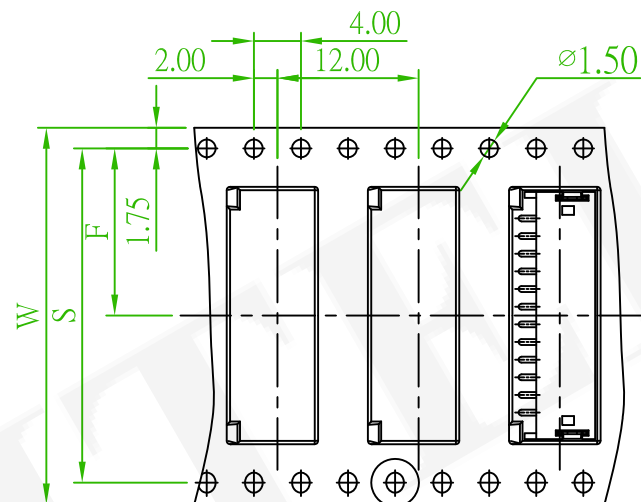

Unreeling direction →

R0.85

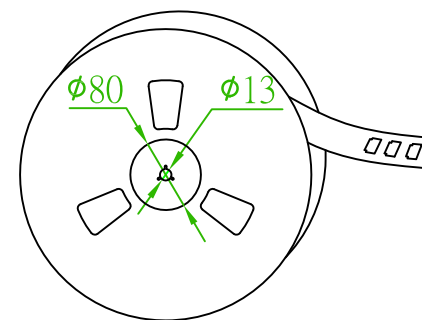

Old Part No.: 1500MR-XXGW-U

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
2P	16	7.50		1,000
3P	16	7.50		1,000
4P	24	11.50		1,000
5P	24	11.50		1,000
6P	24	11.50		1,000
7P	24	11.50		1,000
8P	24	11.50		1,000
9P	32	14.20	28.40	1,000
10P	32	14.20	28.40	1,000
11P	32	14.20	28.40	1,000
12P	32	14.20	28.40	1,000
13P	44	20.20	40.40	1,000

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER SMT RIGHT ANGLE			頁數 Page	1/2
	品號 PART NO.	5W1500H0-1XXG0WHUA01			繪圖 DRAWN	Jeff 2016/08/18
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris 2016/08/18
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/18
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	