

SPECIFICATIONS

Current Rating: 1A AC, DC

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Contact Pin: Brass

Insulator: Nylon 66, UL94V-0


ORDER INFORMATION

5 W 1 5 0 0 R 0 - 1 X X T 0 W B L A 0 1




1:Single Row	No. of Contacts per Row	T0:Tin Plated	W:Natural	B:Bag	RoHS
--------------	-------------------------	---------------	-----------	-------	------



No. of Contacts	Dimensions(mm)		
	A	B	C
02	1.50	4.50	3.75
03	3.00	6.00	5.25
04	4.50	7.50	6.75
05	6.00	9.00	8.25
06	7.50	10.50	9.75
07	9.00	12.00	11.25
08	10.50	13.50	12.75
09	12.00	15.00	14.25
10	13.50	16.50	15.75
11	15.00	18.00	17.25
12	16.50	19.50	18.75
13	18.00	21.00	20.25

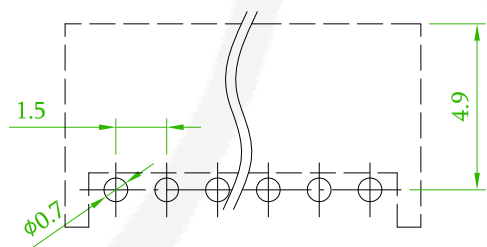

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

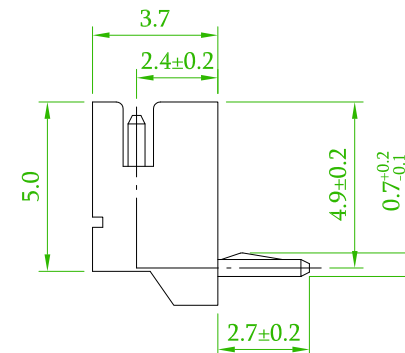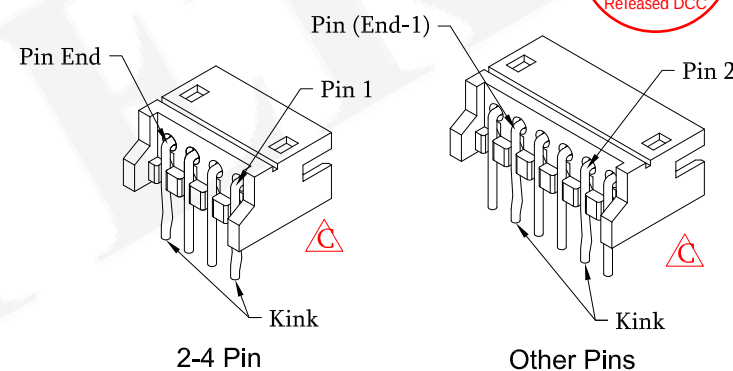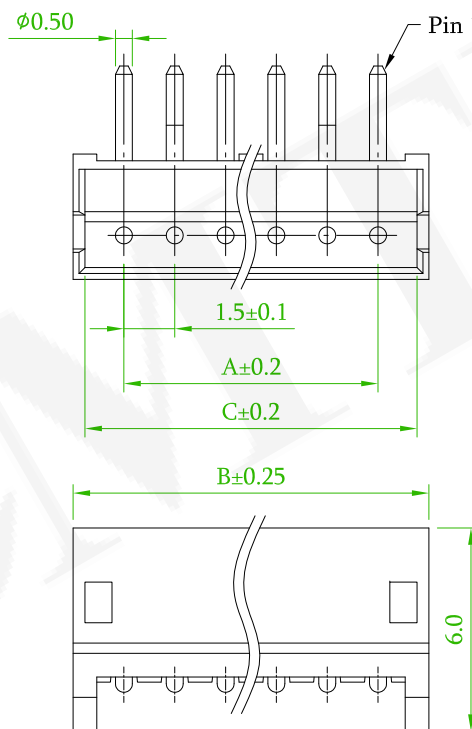

Old Part No.:1500R-XXTW-L

	Add drawings.	Gary	2018/04/23
	ECN No.:170908, revised the Color.	Kilin	2017/09/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.5mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5W1500R0-1XXT0WBLA01				繪圖 DRAWN	Jeff 2016/08/18
圖號 DRAWING NO.	GW090-KL033	版本 REV.	C	核對 CHECKED	Josh 2018/04/23	
客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2018/04/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		