

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute

MATERIAL


Contact: Brass
Insulator: Nylon 66,UL94V-0

ORDER INFORMATION







5	W	1	5	0	0	S	0	-	1	X	X	T	0	W	B	L	A	0	1
Pitch 1.50mm				1:Single Row		No. of contacts per row		T0:Tin Plated		W:Nylon Nature		B:Bag		RoHS					




No. of contacts	Dimensions		
	A	B	C
02	1.50	4.50	3.75
03	3.00	6.00	5.25
04	4.50	7.50	6.75
05	6.00	9.00	8.25
06	7.50	10.50	9.75
07	9.00	12.00	11.25
08	10.50	13.50	12.75
09	12.00	15.00	14.25
10	13.50	16.50	15.75
11	15.00	18.00	17.25
12	16.50	19.50	18.75
13	18.00	21.00	20.25
15	21.00	24.00	23.25

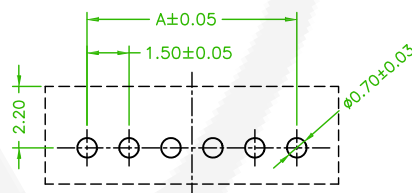

P.C.B. LAYOUT
(TOP VIEW)



02P~04P外K位置
(K腳在邊上的兩個PIN)

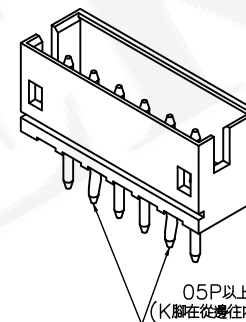

05P以上外K位置
(K腳在從邊往內的第二PIN)



Old Part No.:1500S-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN No.:170908, Revised the Color	Killin	2017/09/07

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W1500S0-1XXT0WBLA01				繪圖 DRAWN	Mia 2015/09/04
	圖號 DRAWING NO.	GW090-KL032	版本 REV.	B	核對 CHECKED	John 2015/09/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		