



SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 350V AC, DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0

ORDER INFORMATION

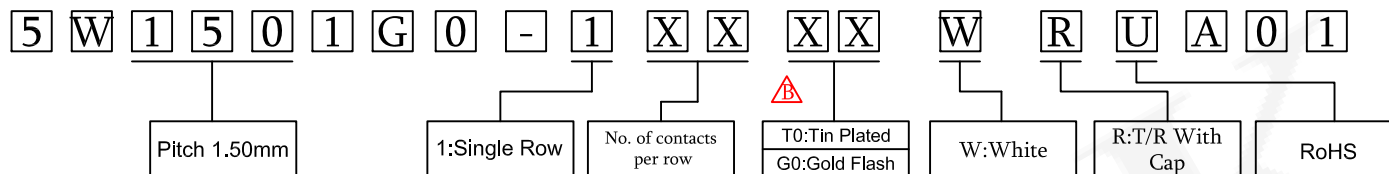

No. of contacts	Dimensions	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

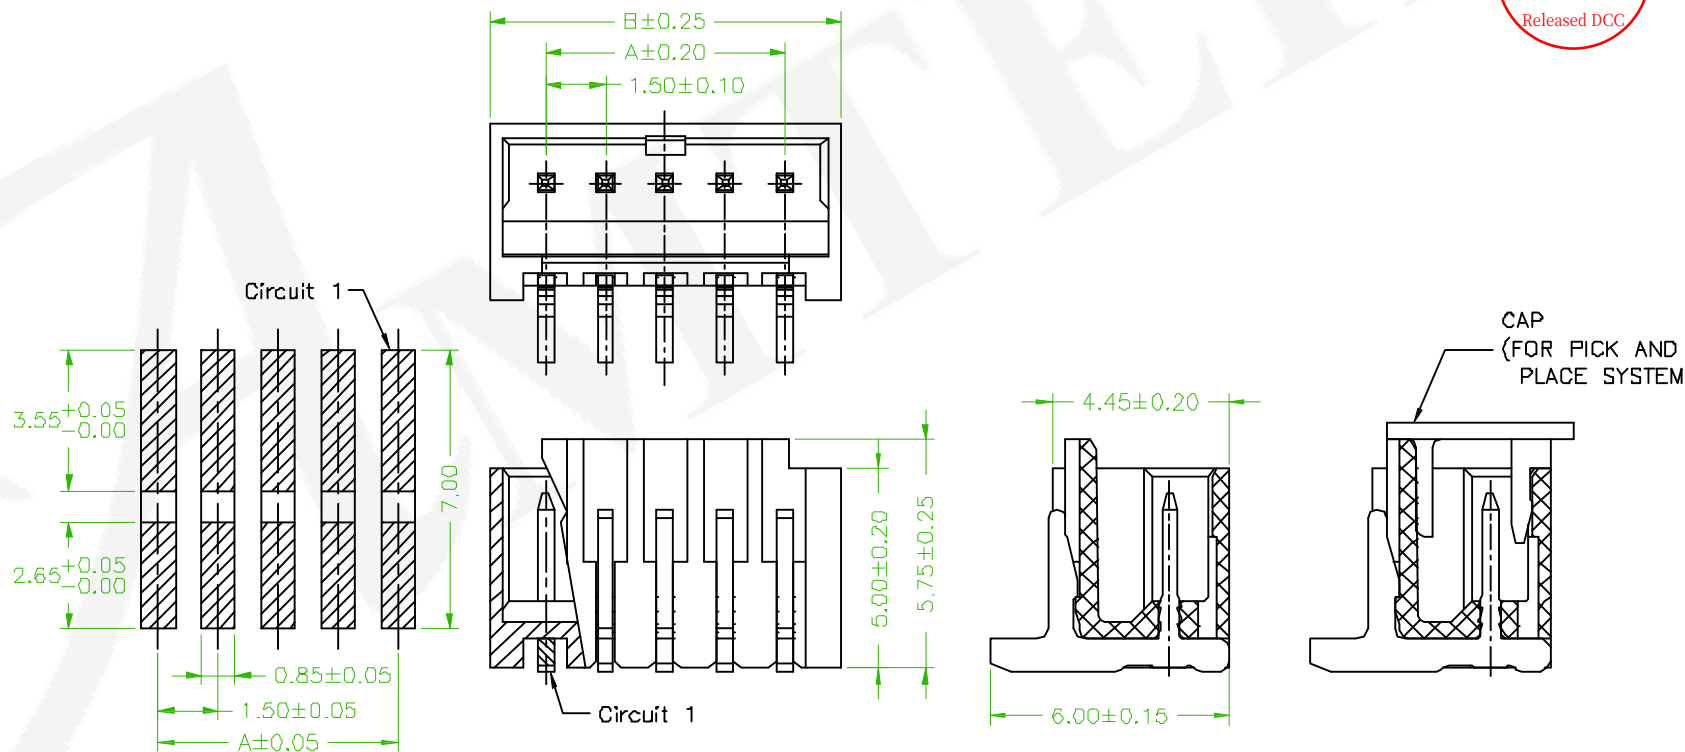

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Old Part No.: 1501MS-XXTWR-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Add the Plated option.	Roy	2019/02/21

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER				頁數 Page	1/1
	品號 PART NO.	5W1501G0-1XXXXWRUA01				繪圖 DRAWN	Jeff 2016/12/14
	圖號 DRAWING NO.	GW090-JF081	版本 REV.	B	核對 CHECKED	Josh 2019/02/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/21	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		