

SPECIFICATIONS

Current Rating:3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute


Pin Material: Brass/Tin-plated

Material: Nylon 6T,UL94V-0





ORDER INFORMATION

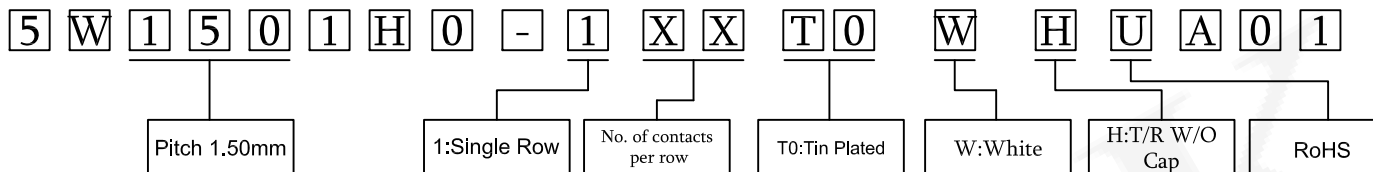

No. of contacts	Dimensions	
	A	B
102	1.50	4.30
103	3.00	5.80
104	4.50	7.30
105	6.00	8.80
106	7.50	10.30
107	9.00	11.80
108	10.50	13.30
109	12.00	14.80
110	13.50	16.30
111	15.00	17.80
112	16.50	19.30
113	18.00	20.80
114	19.50	22.30
115	21.00	23.80

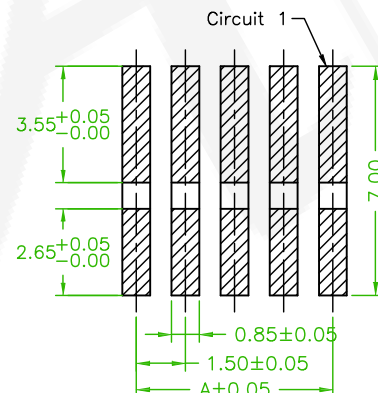

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

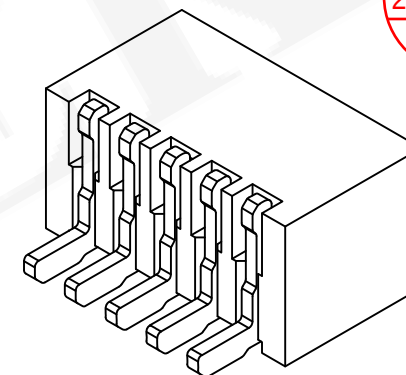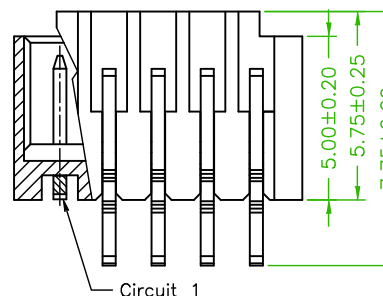

Old Part No.:1501MR-XXTWR-U



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030


品名 TITLE	1.5mm WAFER SMT RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	5W1501H0-1XXT0WHUA01				繪圖 DRAWN	Jeff 2016/10/13
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/13	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		




2~9 Contacts

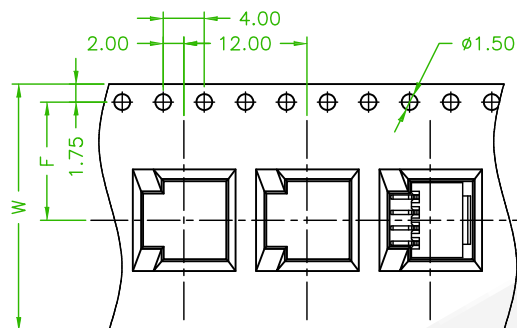




10~15 Contacts

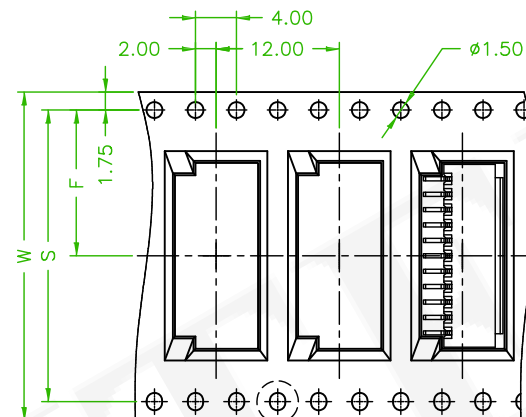

Unreeling direction →

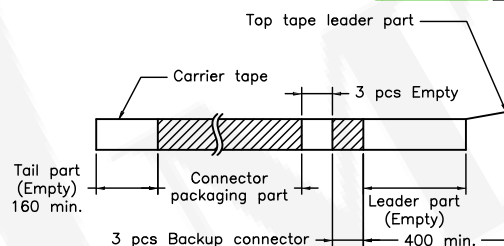

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50		1,000
03P	16	7.50		1,000
04P	24	11.50		1,000
05P	24	11.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	24	11.50		1,000
10P	32	14.20	28.40	1,000
11P	32	14.20	28.40	1,000
12P	32	14.20	28.40	1,000
13P	32	14.20	28.40	1,000
14P	44	20.20	40.40	1,000
15P	44	20.20	40.40	1,000

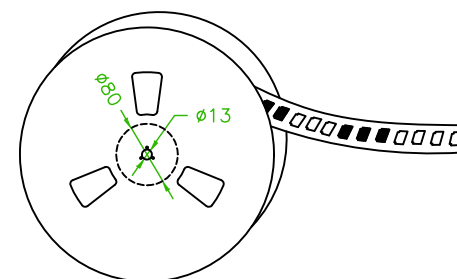

Old Part No.:1501MR-XXTWR-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm WAFER SMT RIGHT ANGLE			頁數 Page	1/1
	品號 PART NO.	5W1501H0-1XXT0WHUA01			繪圖 DRAWN	Jeff 2016/10/13
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/13
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/13
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	