

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute

MATERIAL

Contact: Brass
Insulator: Nylon 66,UL94V-0

ORDER INFORMATION

5 W 2 0 0 1 S 0 - 1 X X T 0 X B L A 0 1

Pitch 2.00mm

1:Single Row

No. of contacts per row

T0: Tin Plated

W:White
B:Black
U:Blue

B:Bag

RoHS











AMTEK 糧德

2021.11.24


Released DCC

No. of contacts	Dimensions		
	A	B	C
02	2.00	6.00	4.80
03	4.00	8.00	6.80
04	6.00	10.00	8.80
05	8.00	12.00	10.80
06	10.00	14.00	12.80
07	12.00	16.00	14.80
08	14.00	18.00	16.80
09	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80
16	30.00	34.00	32.80
17	32.00	36.00	34.80
18	34.00	38.00	36.80

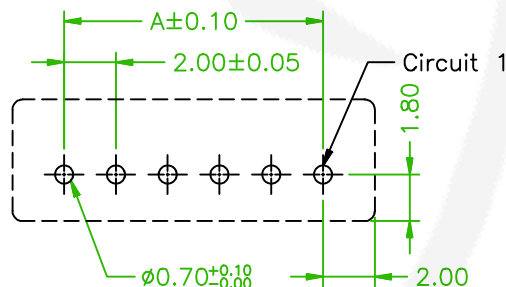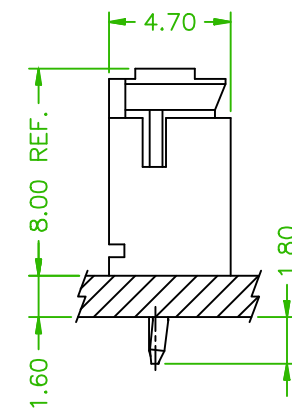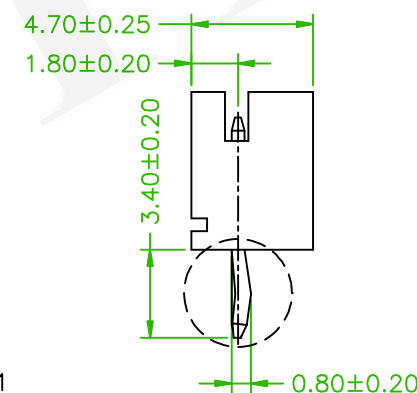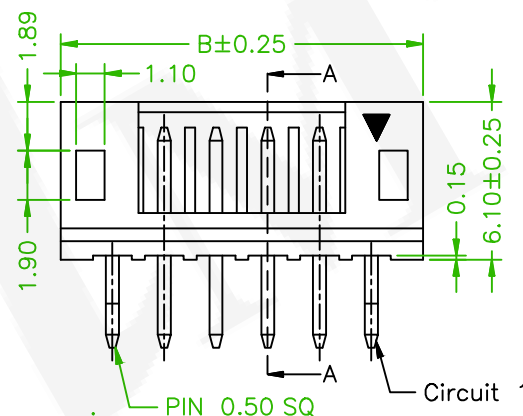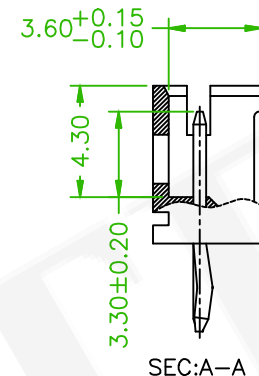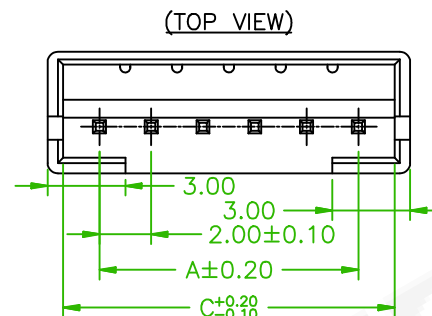

P.C.B LAYOUT(TOP VIEW)

Old Part No.:2001S-XXTW-L



品名 TITLE	2.0mm WAFER STRAIGHT				頁數 Page	1/1
品號 PART NO.	5W2001S0-1XXT0XBLA01				繪圖 DRAWN	Mia 2016/06/23
圖號 DRAWING NO.	GW090-BN685				核對 CHECKED	John 2016/06/23
客戶品號 CUSTOMER P/N					承認 APPROVED	John 2016/06/23
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Add the color options	Alice	2021/11/24
△x2	Add the color options	Benson	2021/10/05