


Current Rating: 3 AMP
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute

MATERIAL


Contact: Brass

Insulator: PA66, UL94V-0







ORDER INFORMATION

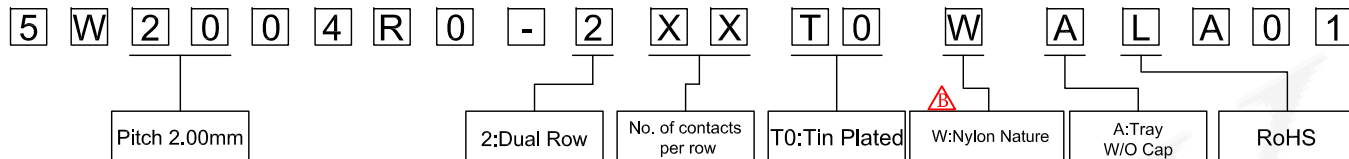

No. of contacts	Dimensions			
	A	B	C	D
2x02	2.00	6.00	4.70	---
2x03	4.00	8.00	6.70	2.00
2x04	6.00	10.00	8.70	4.00
2x05	8.00	12.00	10.70	6.00
2x06	10.00	14.00	12.70	8.00
2x07	12.00	16.00	14.70	10.00
2x08	14.00	18.00	16.70	12.00
2x09	16.00	20.00	18.70	14.00
2x10	18.00	22.00	20.70	16.00
2x11	20.00	24.00	22.70	18.00
2x12	22.00	26.00	24.70	20.00
2x13	24.00	28.00	26.70	22.00
2x14	26.00	30.00	28.70	24.00
2x15	28.00	32.00	30.70	26.00
2x16	30.00	34.00	32.70	28.00
2x17	32.00	36.00	34.70	30.00
2x18	34.00	38.00	36.70	32.00
2x19	36.00	40.00	38.70	34.00
2x20	38.00	42.00	40.70	36.00

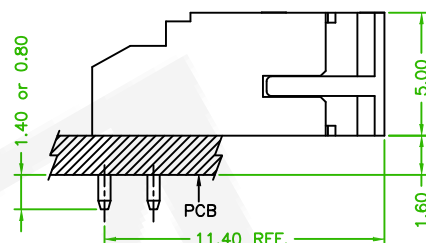

MATED CONDITION

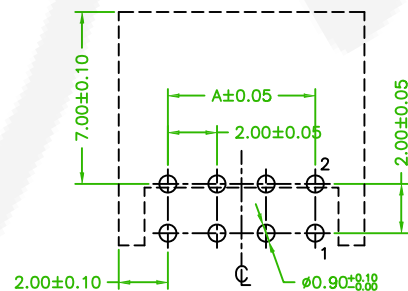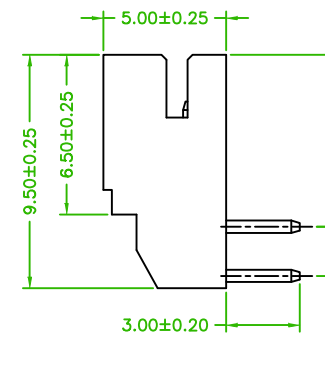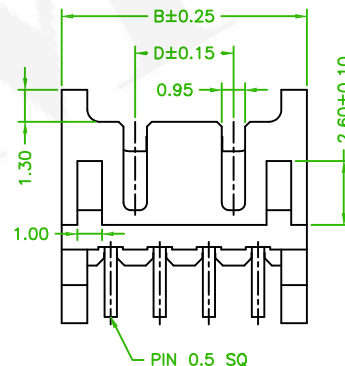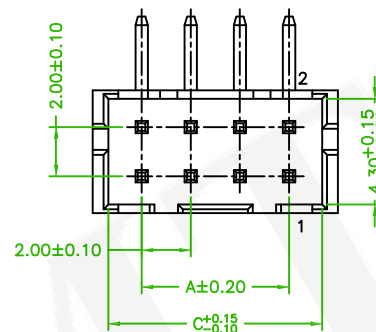

P.C.B LAYOUT

Old Part No. : 2004R-2XXTW-L

	ECN No.:170908, Revised the Color	Kilin	2017/09/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm WAFER R/A TYPE				頁數 Page	1/1
品號 PART NO.	5W2004R0-2XXT0WALA01			繪圖 DRAWN	Eloise 2017/06/29	
圖號 DRAWING NO.	GW090-EL539	版本 REV.	B	核對 CHECKED	Carol 2017/06/29	
客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	Jason 2017/06/29	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		