

SPECIFICATIONS


Current Rating: 4A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute

MATERIAL


Pin Material: Brass

Material:Nylon 6T,UL94V-0

ORDER INFORMATION

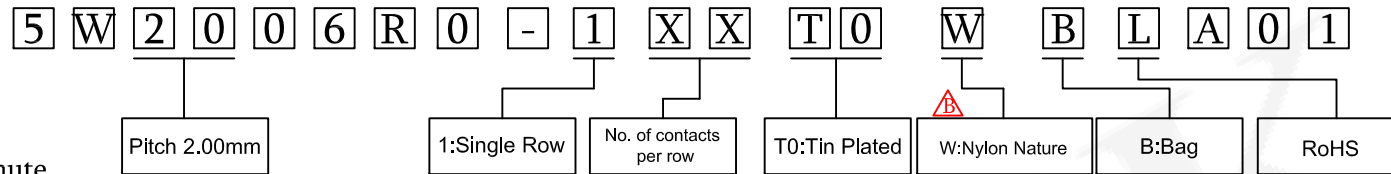

No. of contacts	Dimensions	
	A	B
02	2.00	5.96
03	4.00	7.96
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96

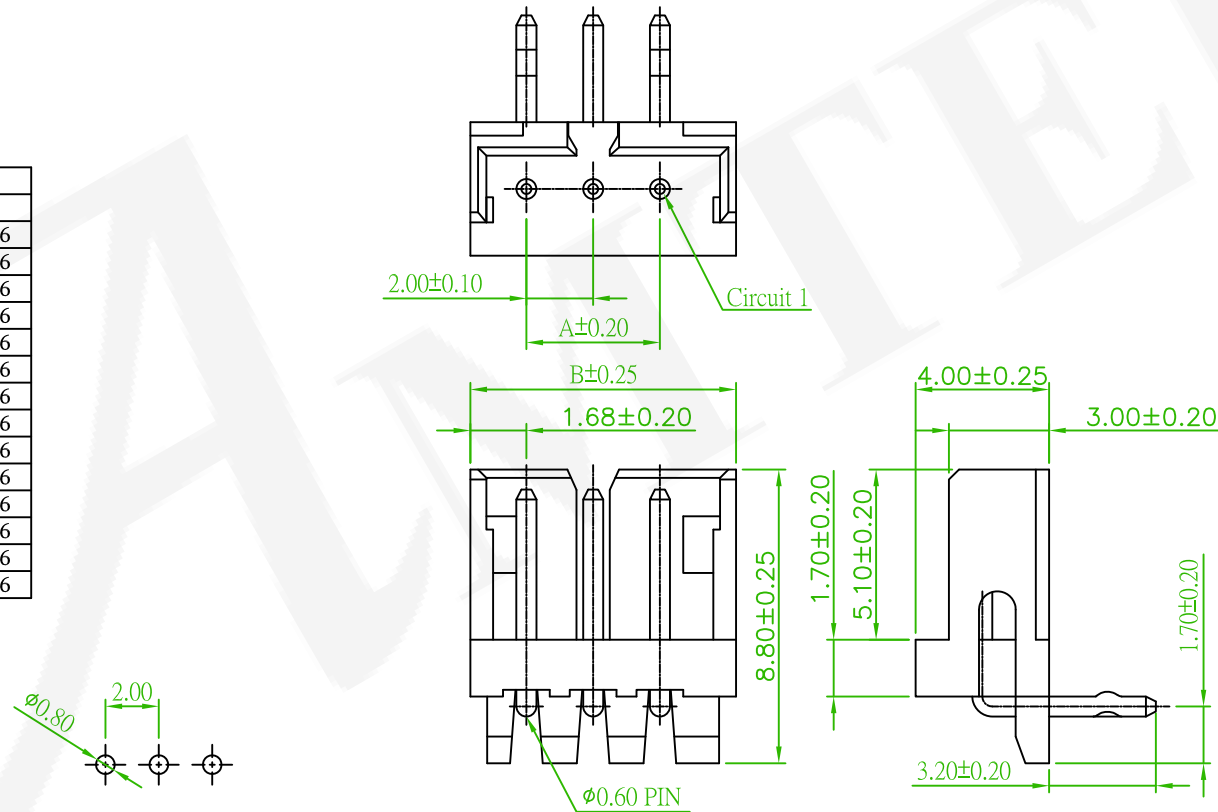

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:2006R-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN No.:170908, Revised the Color	Kilin	2017/09/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2006R0-1XXT0WBLA01				繪圖 DRAWN	Kent 2007/09/13
	圖號 DRAWING NO.	GW090-EL031	版本 REV.	B	核對 CHECKED	Paul 2007/09/13	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/09/13	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		