

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min


Withstanding Voltage: 1000V AC/minute

MATERIAL


Pin Material: Brass

Material:Nylon 66,UL94V-0

ORDER INFORMATION

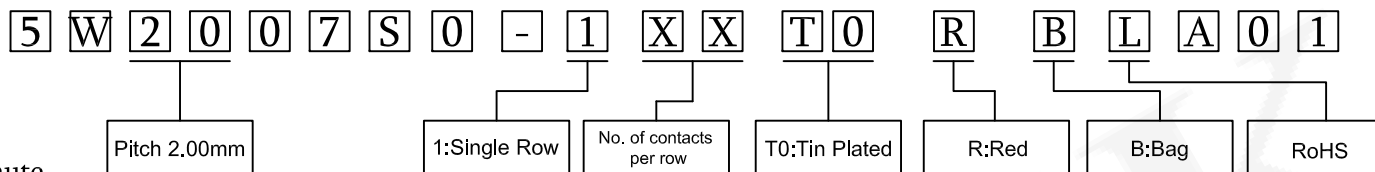

No. of contacts	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00








TYPE 1



TYPE 3



TYPE 2

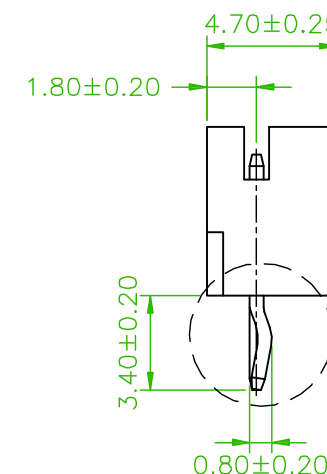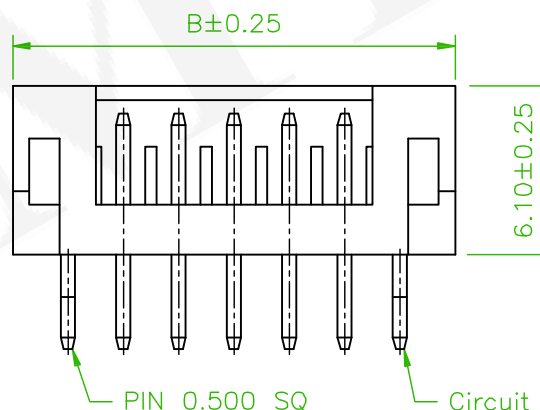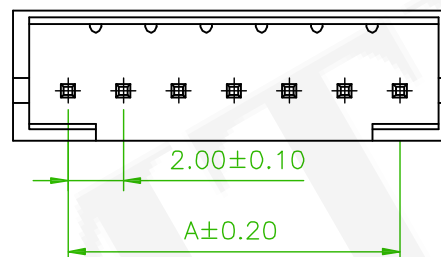

P.C.B LAYOUT

Old Part No.:2007S-XXTR-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2007S0-1XXT0RBLA01				繪圖 DRAWN	Athena 2015/04/27
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED		Paul 2015/04/27
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		James 2015/04/27
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		