

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute

MATERIAL

Solder Tabs: Brass
Material:Nylon 46,UL94V-0

ORDER INFORMATION

5

W

2

0

0

8

R

0

-

1

X

X

X

X

X

X

U

A

0

1

Pitch 2.00mm

1:Single Row

No. of contacts per row


G0:Gold Flash
T0:Tin Plated

W:White

B:Bag

RoHS

No. of contacts	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

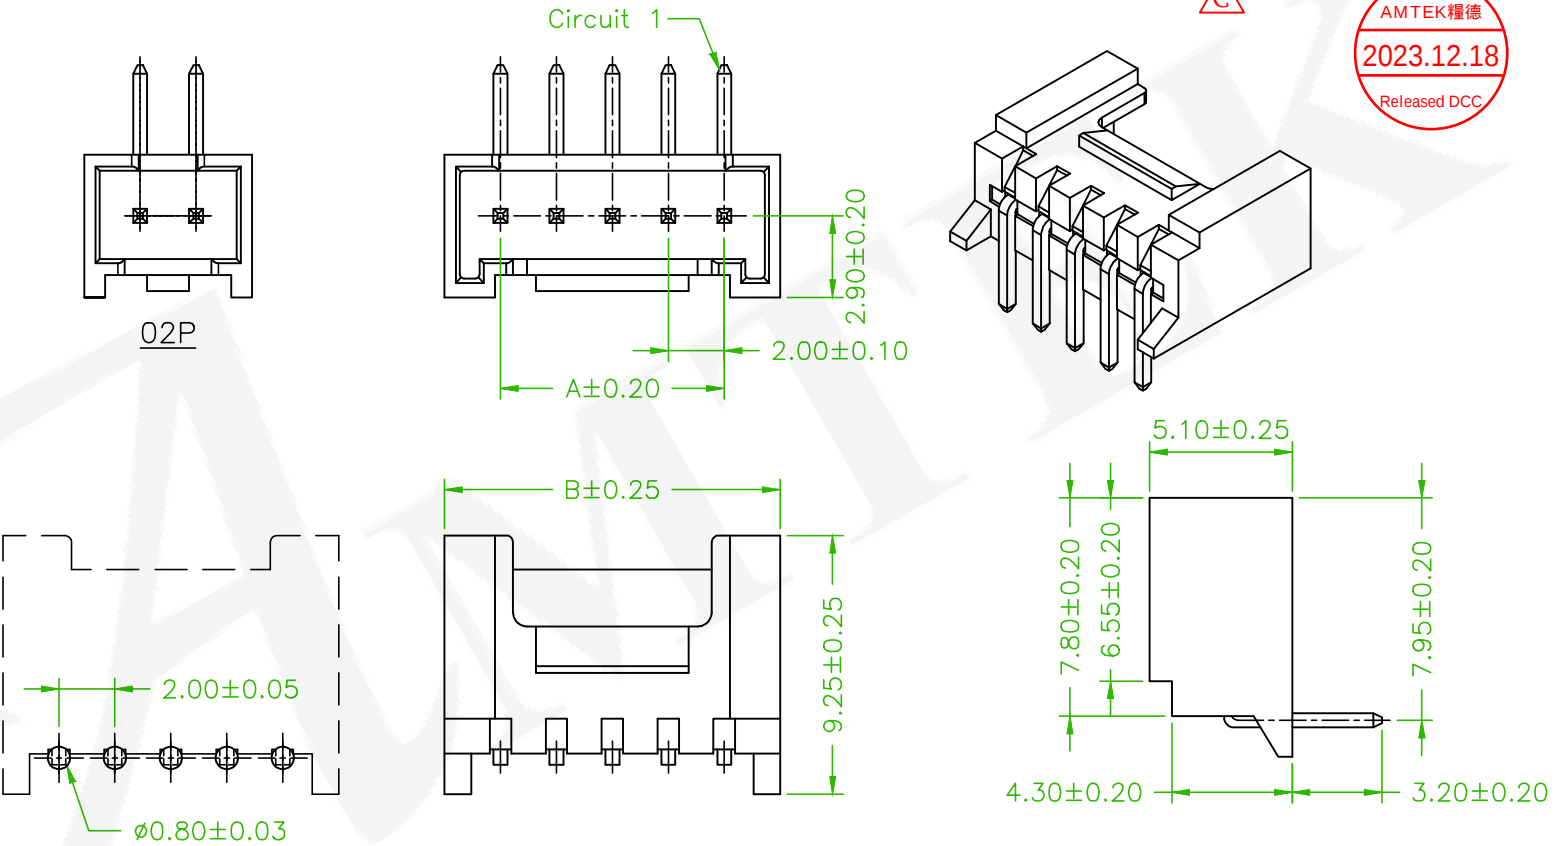

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:2008R-XXTW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN NO.:231117 Revise the Packing Options	Gaby	2023/12/13
△Bx2	Add: Reel W/O Cap	David	2019/04/26

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER				頁數 Page	1/1
	品號 PART NO.	△B 5W2008R0-1XXXXXXUA01				繪圖 DRAWN	Eloise 2016/12/02
	圖號 DRAWING NO.	GW090-EL012	版本 REV.	C	核對 CHECKED	Jonny 2016/12/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/02	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		