

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 1000V AC/minute

MATERIAL




Solder Tabs: Brass

Material: Nylon 46,UL94V-0

ORDER INFORMATION

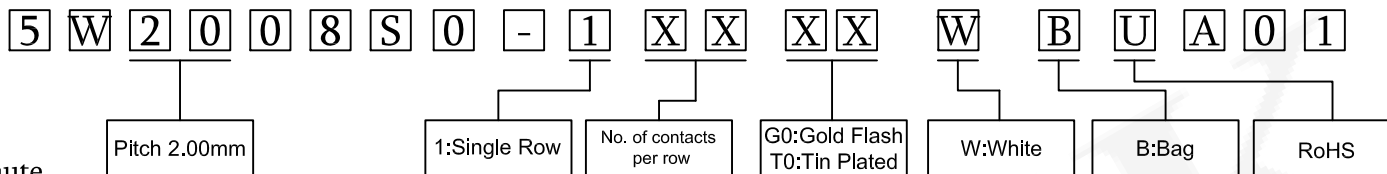

No. of contacts	Dimensions			
	A	B	C	D
02	2.00	6.00	1.50	4.90
03	4.00	8.00	1.46	6.90
04	6.00	10.00	3.46	8.90
05	8.00	12.00	5.46	10.90
06	10.00	14.00	7.46	12.90
07	12.00	16.00	9.46	14.90
08	14.00	18.00	11.46	16.90
09	16.00	20.00	13.46	18.90
10	18.00	22.00	15.46	20.90
11	20.00	24.00	17.46	22.90
12	22.00	26.00	19.46	24.90
13	24.00	28.00	21.46	26.90
14	26.00	30.00	23.46	28.90
15	28.00	32.00	25.46	30.90
16	30.00	34.00	27.46	32.90

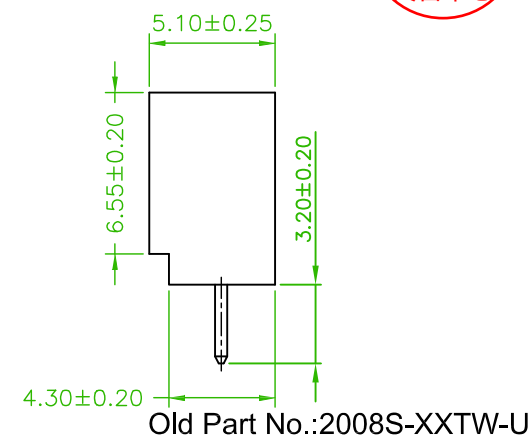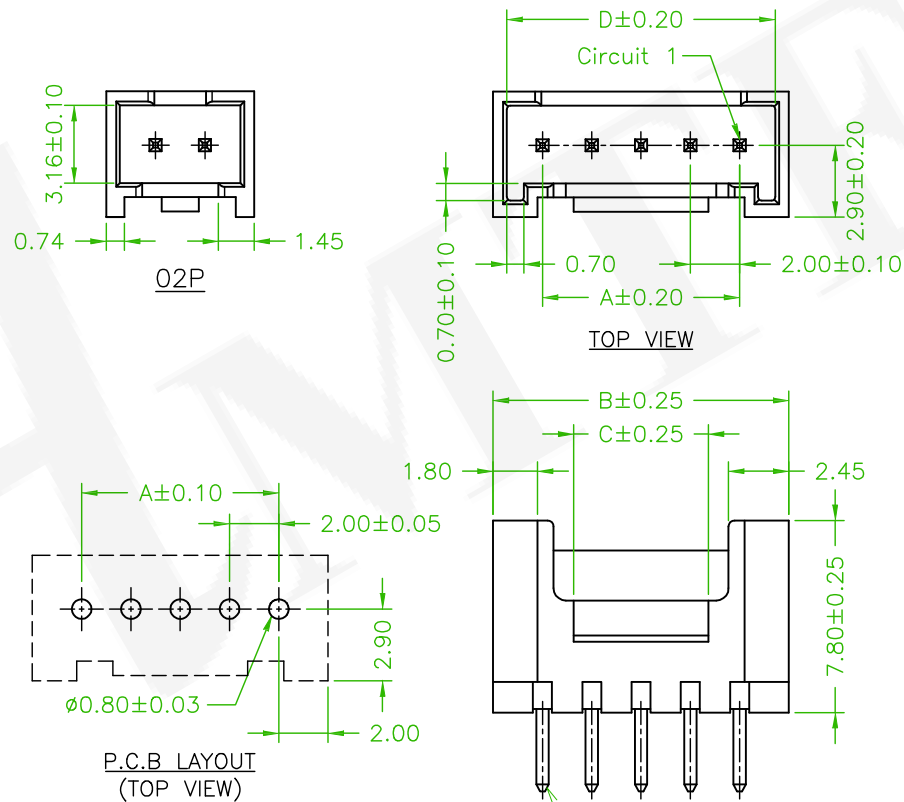

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER				頁數 Page	1/1
	品號 PART NO.	5W2008S0-1XXXXWBUA01				繪圖 DRAWN	Eloise 2016/12/02
	圖號 DRAWING NO.	GW090-EL013	版本 REV.	A	核對 CHECKED	Jonny 2016/12/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/02	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		