


SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute






MATERIAL

Pin Material: Brass
Material: Nylon 66, UL94V-0

ORDER INFORMATION

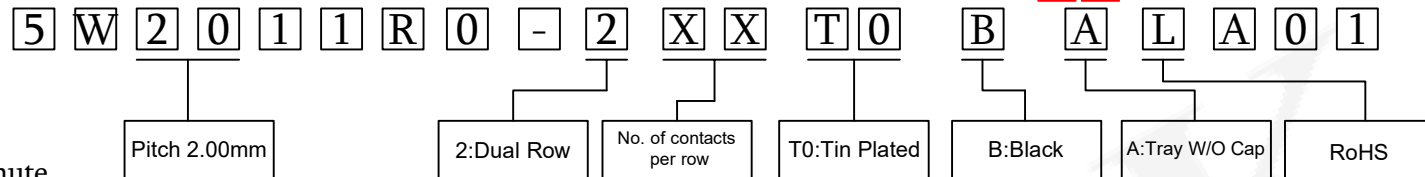

No. of contacts	Dimensions	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

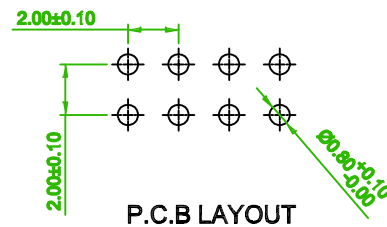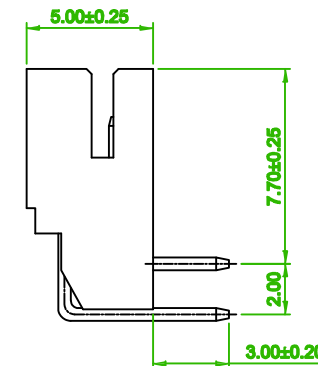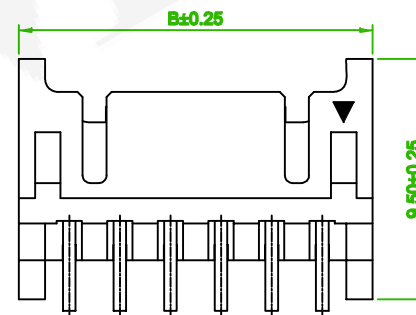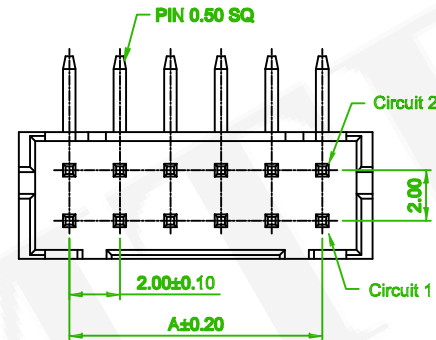

P.C.B LAYOUT

Old Part No.: 2211R-2XXTB-L

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2011R0-2XXT0BALA01				繪圖 DRAWN	Jeff 2012/06/18
	圖號 DRAWING NO.	GW090-EL039				核對 CHECKED	Sarah 2012/06/18
	客戶品號 CUSTOMER P/N					承認 APPROVED	John 2012/06/18
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20				單位 UNIT	mm
		版本 REV.	C	比例 SCALE	None	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C x2	ECN 200209.: Remove the Package	David	2020/02/21
△B x2	Add: A:Tray W/O Cap	David	2020/01/20