


## SPECIFICATIONS

Current Rating: 2A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute

## MATERIAL






Pin Material: Brass  
Material: Nylon 66, UL94V-0

## ORDER INFORMATION

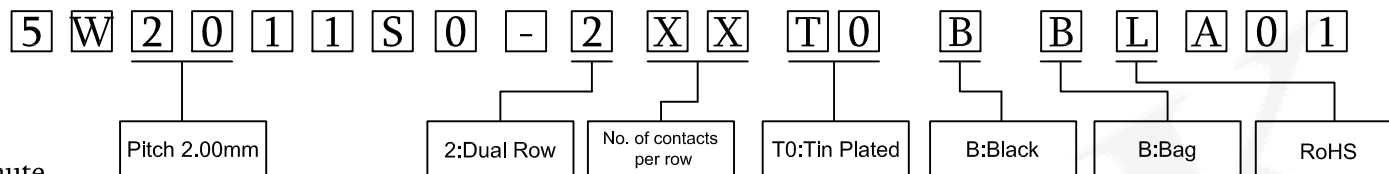

Amtek  
2017.08.29  
文管中心

| No. of contacts | Dimensions |       |
|-----------------|------------|-------|
|                 | A          | B     |
| 2x02            | 2.00       | 6.00  |
| 2x03            | 4.00       | 8.00  |
| 2x04            | 6.00       | 10.00 |
| 2x05            | 8.00       | 12.00 |
| 2x06            | 10.00      | 14.00 |
| 2x07            | 12.00      | 16.00 |
| 2x08            | 14.00      | 18.00 |
| 2x09            | 16.00      | 20.00 |
| 2x10            | 18.00      | 22.00 |
| 2x11            | 20.00      | 24.00 |
| 2x12            | 22.00      | 26.00 |
| 2x13            | 24.00      | 28.00 |
| 2x14            | 26.00      | 30.00 |
| 2x15            | 28.00      | 32.00 |
| 2x16            | 30.00      | 34.00 |
| 2x17            | 32.00      | 36.00 |
| 2x18            | 34.00      | 38.00 |
| 2x19            | 36.00      | 40.00 |
| 2x20            | 38.00      | 42.00 |

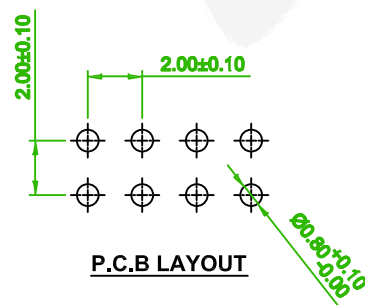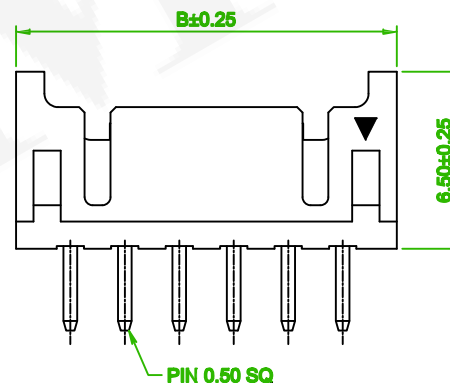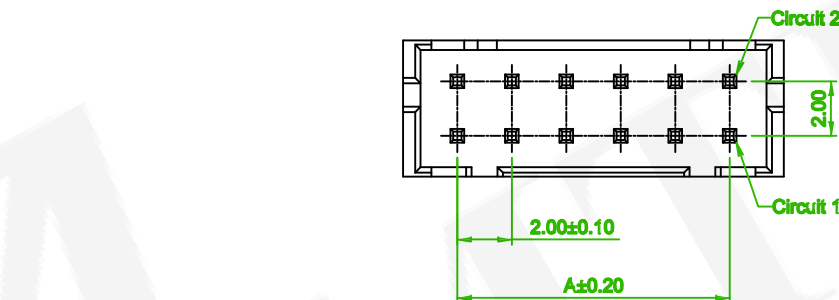

Old Part No.: 2211S-2XXTB-L

| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
|------|------------------------|---------|------|
|      |                        |         |      |
|      |                        |         |      |
|      |                        |         |      |
|      |                        |         |      |

|                                                                                            |                      |                         |             |      |                              |                       |                      |
|--------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------|------|------------------------------|-----------------------|----------------------|
| <br>糧德精密有限公司<br>Amtek Technology Co., Ltd.<br>TEL: 886-2-2260-6878<br>FAX: 886-2-2260-8030 | 品名<br>TITLE          | 2.0mm WAFER STRAIGHT    |             |      |                              | 頁數<br>Page            | 1/1                  |
|                                                                                            | 品號<br>PART NO.       | 5W2011S0-2XXT0BBLA01    |             |      |                              | 繪圖<br>DRAWN           | Sinnys<br>2011/06/18 |
|                                                                                            | 圖號<br>DRAWING NO.    | GW090-EL040             | 版本<br>REV.  | A    | 核對<br>CHECKED                | Sharron<br>2011/06/18 |                      |
|                                                                                            | 客戶品號<br>CUSTOMER P/N |                         | 比例<br>SCALE | None | 承認<br>APPROVED               | James<br>2011/06/18   |                      |
|                                                                                            | 公差<br>TOLERANCE      | .X ± 0.30<br>.XX ± 0.20 | 單位<br>UNIT  | mm   | THIRD<br>ANGLE<br>PROJECTION |                       |                      |
|                                                                                            |                      |                         |             |      |                              |                       |                      |