



SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: PBT,UL94V-0

ORDER INFORMATION

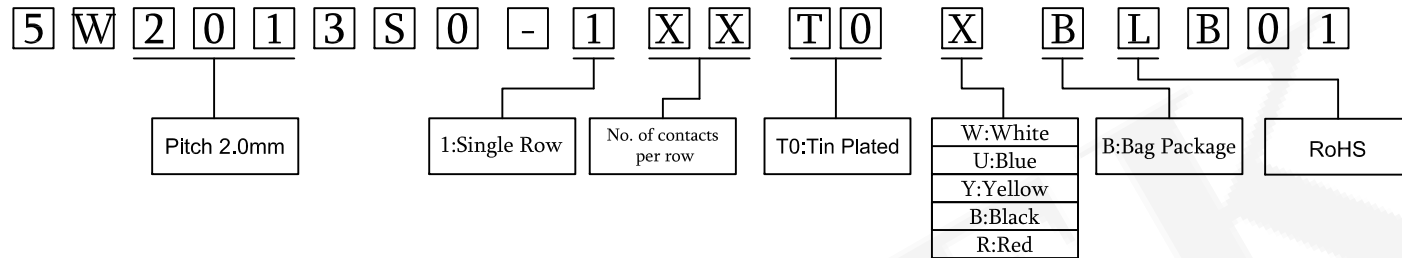


PART NO.	Dimensions	
	A	B
5W2013S0-102T0XBLB01	2.00	6.00
5W2013S0-103T0XBLB01	4.00	8.00
5W2013S0-104T0XBLB01	6.00	10.00
5W2013S0-105T0XBLB01	8.00	12.00
5W2013S0-106T0XBLB01	10.00	14.00
5W2013S0-107T0XBLB01	12.00	16.00
5W2013S0-108T0XBLB01	14.00	18.00
5W2013S0-109T0XBLB01	16.00	20.00
5W2013S0-110T0XBLB01	18.00	22.00
5W2013S0-111T0XBLB01	20.00	24.00
5W2013S0-112T0XBLB01	22.00	26.00
5W2013S0-113T0XBLB01	24.00	28.00
5W2013S0-114T0XBLB01	26.00	30.00
5W2013S0-115T0XBLB01	28.00	32.00

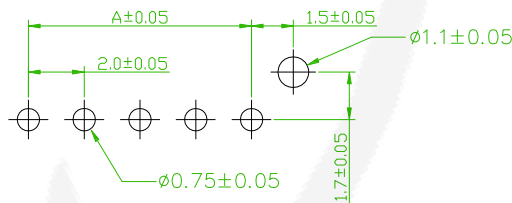


RECOMMENDED P.C. BOARD HOLE DIMM.

(10 to 15 circuits)



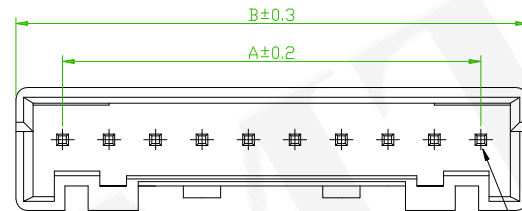


Circuit No.1

(2 to 9 circuits)



Circuit No.1

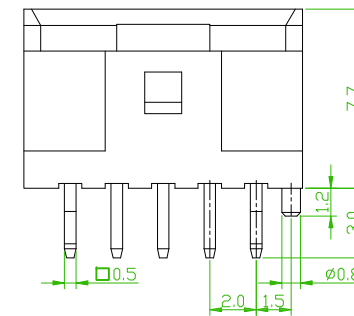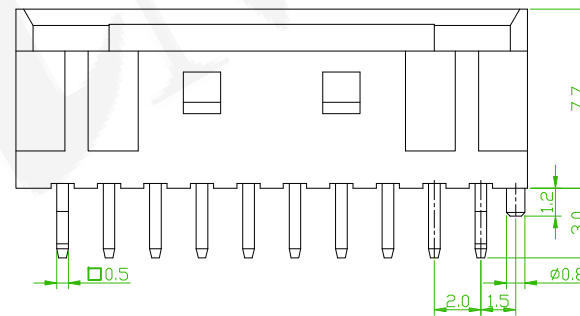

Old Part NO.:2013S-XXTX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2013S0-1XXT0XBLB01				繪圖 DRAWN	Roy 2016/08/26
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/25	
	公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		