






SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating:250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Withstanding Voltage: 1000V AC/minute
Insulation resistance:1000mΩ Min
Contact Material:Brass
Insulator Material:NY66,UL94V-0


ORDER INFORMATION

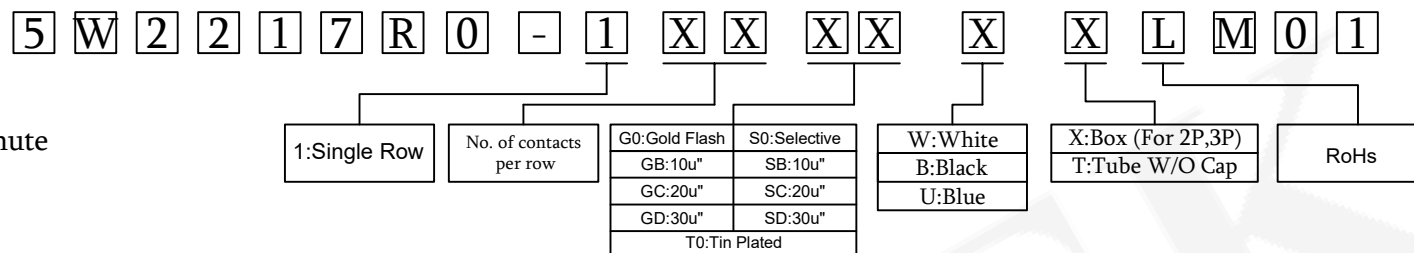

No. of contacts	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

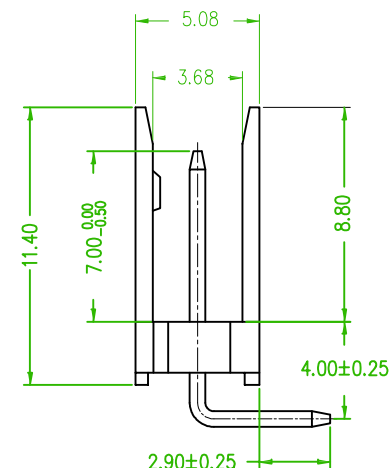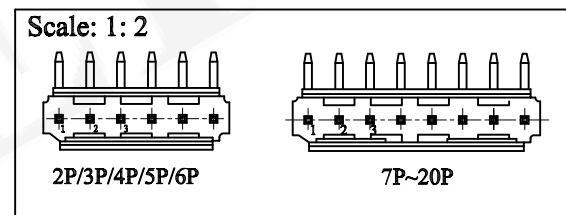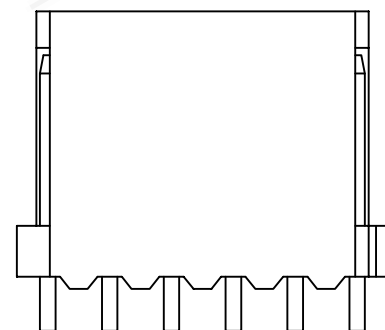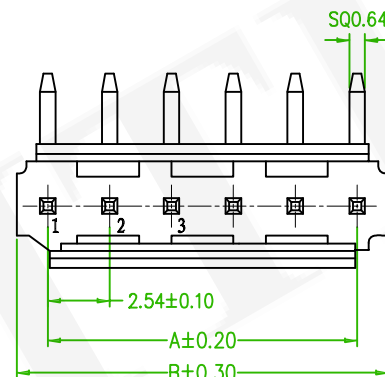

Old Part No.:2217R-1XX-L



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2217R0-1XXXXXXLM01				繪圖 DRAWN	Jeff
	圖號 DRAWING NO.	GN003-JF084	版本 REV.	B	核對 CHECKED	Johnny	2016/10/20
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	2016/10/20
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Add the Option:X:Box (For 2P,3P)	B	2016/12/15 Jeff