

SPECIFICATIONS

Current Rating: 3A AC, DC

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Contact Pin: Copper Alloy

Insulator: Nylon 66,UL94V-0


ORDER INFORMATION

5 W 2 2 1 7 R 0 - 2 X X X X X X L M 0 1




2: Dual Row	No. of contacts per row	G0: Gold Flash T0: Tin Plated	B: Black U: Blue	B: Bag T: Tube W/O Cap X: Box (FOR 2x2, 2x3PIN)	RoHS
-------------	-------------------------	----------------------------------	---------------------	--	------



No. of contacts	Dimensions	
	A	B
2x02	2.54	5.08
2x03	5.08	7.62
2x04	7.62	10.16
2x05	10.16	12.70
2x06	12.70	15.24
2x08	17.78	20.32
2x10	22.86	25.40
2x12	27.94	30.48
2x13	30.48	33.02
2x15	35.56	38.10
2x17	40.64	43.18
2x18	43.18	45.72
2x20	48.26	50.80

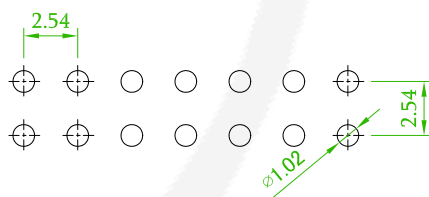

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

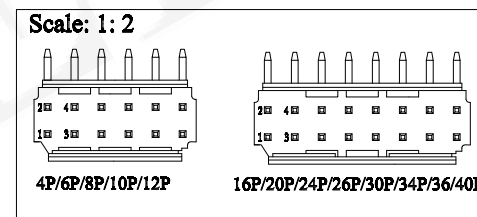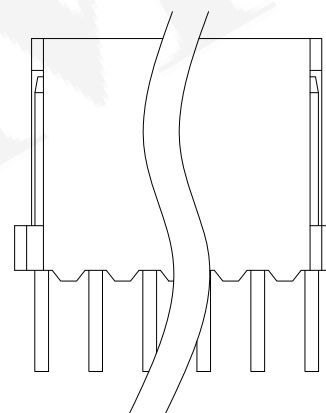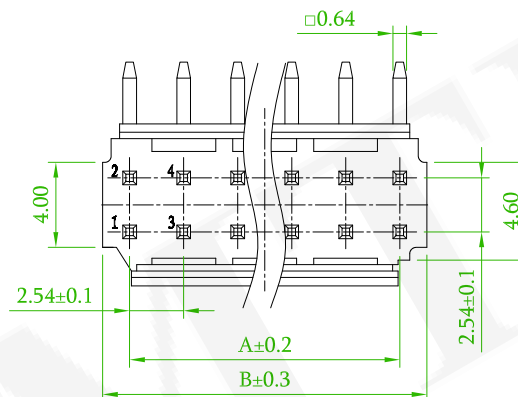

Old Part No.:2217R-2XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Bx1	Revise the package: A:Tray -> B: Box, add the note.	Gary	2018/04/11

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm WAFER D/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5W2217R0-2XXXXXXLM01				繪圖 DRAWN	Jeff 2016/11/21
	圖號 DRAWING NO.	GN003-JF035		版本 REV.	B	核對 CHECKED	Josh 2018/04/11
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/04/11
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	