

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating:250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Withstanding Voltage: 1000V AC/minute

Insulation resistance:1000mΩ Min

MATERIAL

Insulator: NY66,UL94V-0

Contact: Brass

ORDER INFORMATION

5 W 2 2 1 7 S 0 - 1 X X X X X

1:Single Row

No. of contacts
per row

T0: Tin Plated
G0: Gold Plated

U: Blue
B: Black
W: White

B: Bag
A: Tray w/o cap P: Tray with cap
T: Tube w/o cap C: Tube with cap
H: T/R w/o cap R: T/R with cap


RoHS






No. of Contacts	Dimensions		
	A	B	C
02	2.54	5.08	5.00
03	5.08	7.62	6.50
04	7.62	10.16	6.50
05	10.16	12.70	6.50
06	12.70	15.24	6.50
07	15.24	17.78	6.50
08	17.78	20.32	6.50
09	20.32	22.86	6.50
10	22.86	25.40	6.50
11	25.40	27.94	6.50
12	27.94	30.48	6.50
13	30.48	33.02	6.50
14	33.02	35.56	6.50
15	35.56	38.10	6.50
16	38.10	40.64	6.50
17	40.64	43.18	6.50
18	43.18	45.72	6.50
19	45.72	48.26	6.50
20	48.26	50.80	6.50



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

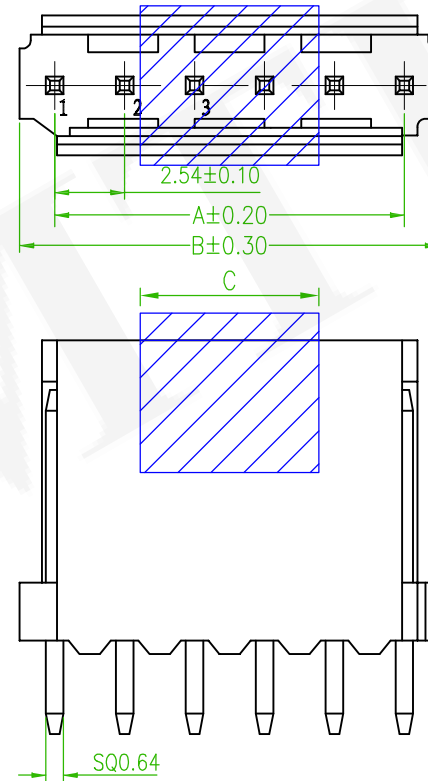

Scale: 1: 2

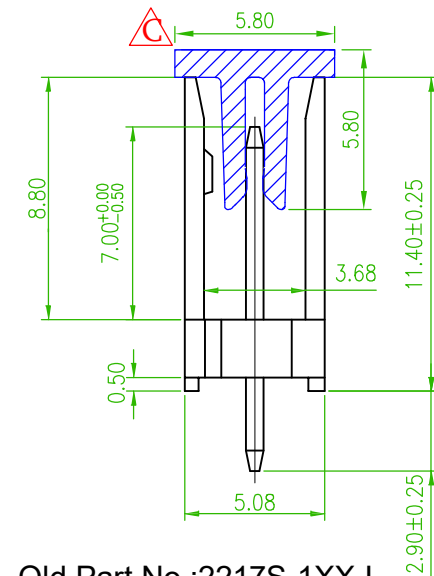

Old Part No.:2217S-1XX-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2217S0-1XXXXXXLM01				繪圖 DRAWN	Jeff 2016/08/31
	圖號 DRAWING NO.	GN003-EL480		版本 REV.	C	核對 CHECKED	Johnny 2016/08/31
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/08/31
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x4	Add the CAP & Package option	Benson	2020/09/17
△x1	Add the P.C.B Layout	Eloise	2017/06/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE