

SPECIFICATIONS

Current Rating: 3A AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1000V AC/minute

MATERIAL


Contact: Brass

Insulator: PA66,UL94V-0


ORDER INFORMATION

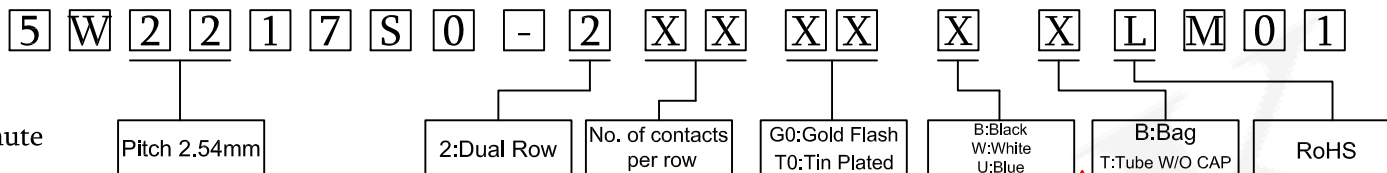




Scale: 1: 2

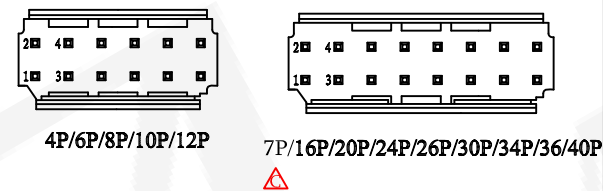

No. of contacts	Dimensions	
	A	B
2x02	2.54	5.08
2x03	5.08	7.62
2x04	7.62	10.16
2x05	10.16	12.70
2x06	12.70	15.24
2x07	15.24	17.78
2x08	17.78	20.32
2x10	22.86	25.40
2x12	27.94	30.48
2x13	30.48	33.02
2x15	35.56	38.10
2x17	40.64	43.18
2x18	43.18	45.72
2x20	48.26	50.80

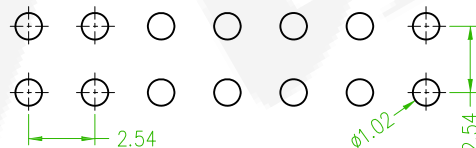

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

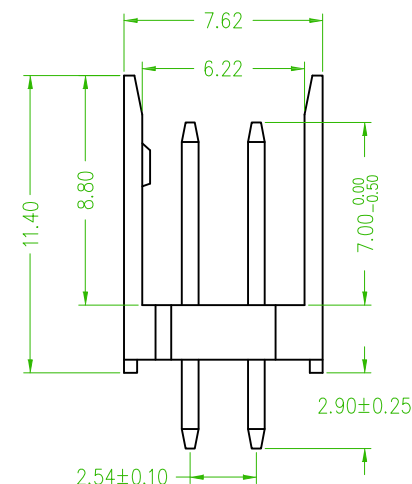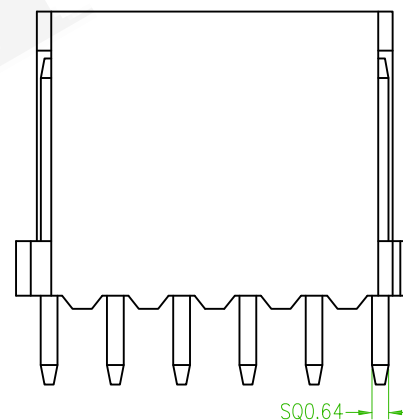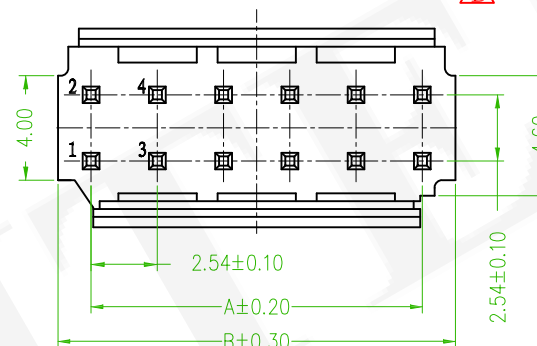

Old Part No.: 2217S-2XX-L



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	Add the 2x7pin	C	2019/11/05 Benson
△	Add the option: W: White and T: Tube Without CAP, B: Bag	B	2017/01/23 Eloise

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2217S0-2XXXXXXLM01				繪圖 DRAWN	Eloise 2017/01/23
	圖號 DRAWING NO.	GW003-EL236	版本 REV.	C	核對 CHECKED	Jonny 2017/01/23	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/01/23	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		