

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

MATERIAL

Contact: Brass







Insulator: Nylon 66,UL94V-0

ORDER INFORMATION

5	W	2	5	0	0	R	0	-	1	X	X	T	0	W	B	L	A	0	1
Pitch 2.50mm				1:Single Row		No. of contacts per row		T0:Tin Plated		W:White		B:Bag		RoHS					



No. of contacts	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

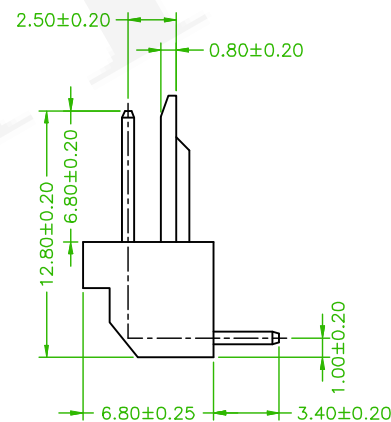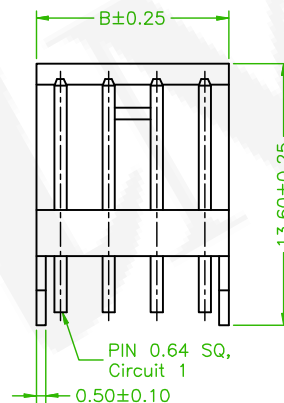

Old Part No.:2500R-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2500R0-1XXT0WBLA01				繪圖 DRAWN	Kent 2005/07/20
	圖號 DRAWING NO.	GW090-EL260	版本 REV.	A	核對 CHECKED	Paul 2005/07/20	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2005/07/20	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		