



Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/ Tin-plated
 Material: Nylon 66,UL94V-2






ORDER INFORMATION

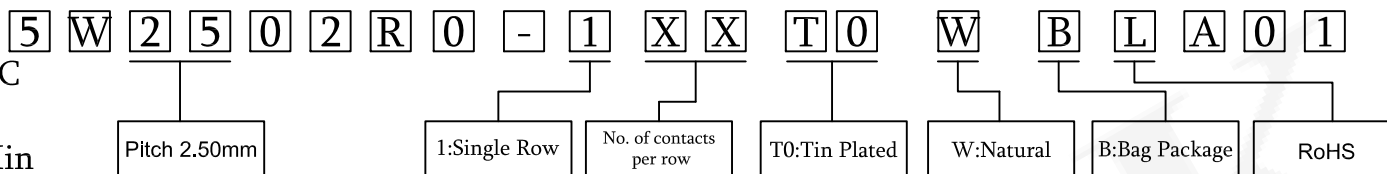

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		D	C
02P	2.50	5.00	12P	27.50	30.00
03P	5.00	7.50	13P	30.00	32.50
04P	7.50	10.00	14P	32.50	35.00
05P	10.00	12.50	15P	35.00	37.50
06P	12.50	15.00	16P	37.50	40.00
07P	15.00	17.50	17P	40.00	42.50
08P	17.50	20.00	18P	42.50	45.00
09P	20.00	22.50	19P	45.00	47.50
10P	22.50	25.00	20P	47.50	50.00
11P	25.00	27.50			

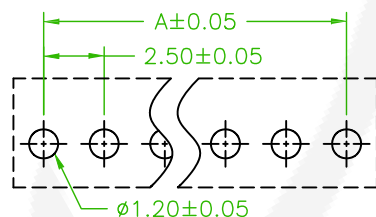

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

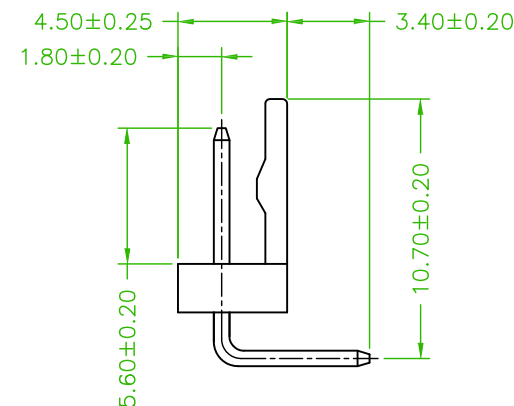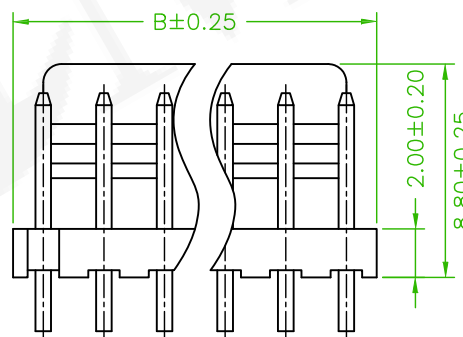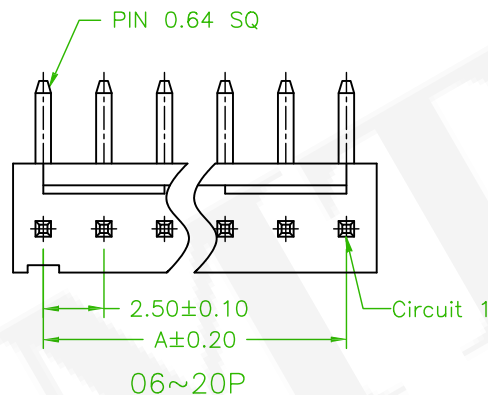

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER RIGHT ANGLE			頁數 Page	1/1
	品號 PART NO.	5W2502R0-1XXT0WBLA01			繪圖 DRAWN	Elisa 2019/03/21
	圖號 DRAWING NO.	GW090-EI027	版本 REV.	A	核對 CHECKED	Josh 2019/03/21
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/21
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	