

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 800V AC/minute

MATERIAL


Contact Pin: Brass/Tin-plated

Insulator:Nylon 66,UL94V-2



ORDER INFORMATION

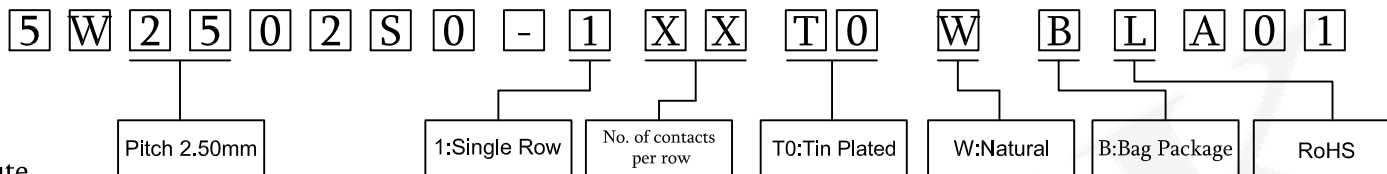

No. of contacts	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

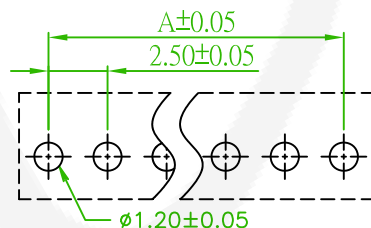

P.C.B LAYOUT

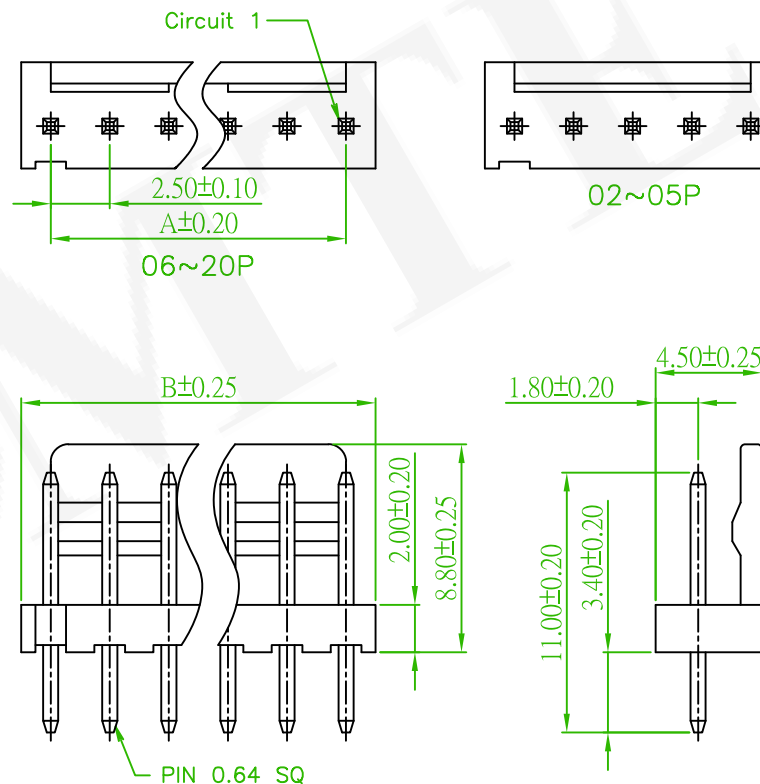

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2502S0-1XXT0WBLA01				繪圖 DRAWN	Nick 2019/03/22
	圖號 DRAWING NO.	GW090-NI012	版本 REV.	A	核對 CHECKED	Josh 2019/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/22	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		