

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1500V AC/minute

Terminal: Brass/Tin Plated

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 W 2 5 0 4 R 0 - 1 X X T 0 R B L A 0 1

Pitch 2.50mm

1:Single Row

No. of contacts
per row

T0:Tin Plated

R:Red
Insulator



B:Bag Package

RoHS





No. of contacts	Dimensions	
	A	B
1x02	2.50	5.00
1x03	5.00	7.50
1x04	7.50	10.00
1x05	10.00	12.50
1x06	12.50	15.00
1x07	15.00	17.50
1x08	17.50	20.00
1x09	20.00	22.50
1x10	22.50	25.00
1x11	25.00	27.50
1x12	27.50	30.00
1x13	30.00	32.50
1x14	32.50	35.00
1x15	35.00	37.50

07P~15P


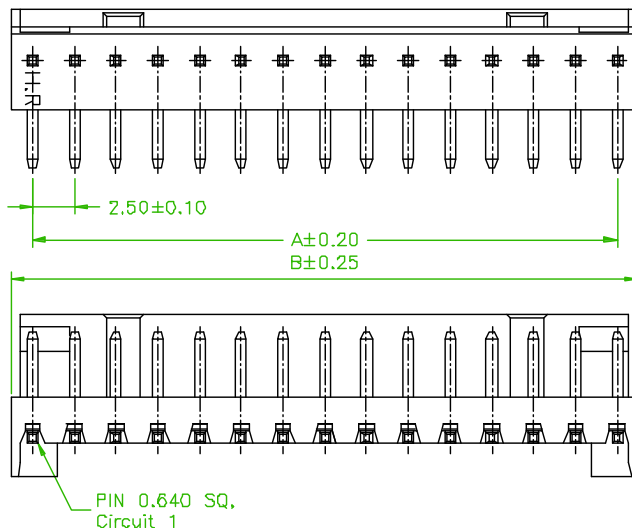


02P,03P




PIN 0.640 SQ,
Circuit 1


04P~06P



PIN 0.640 SQ,
Circuit 1



P.C.B LAYOUT



Old Part No.:2504R-XXTR-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.5mm WAFER RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	5W2504R0-1XXT0RBLA01				繪圖 DRAWN	Jeff 2016/11/21
圖號 DRAWING NO.	GW090-JF036	版本 REV.	A	核對 CHECKED	Jonny 2016/11/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		