

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating:500V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated


Material: Nylon 66,UL94V-0

ORDER INFORMATION

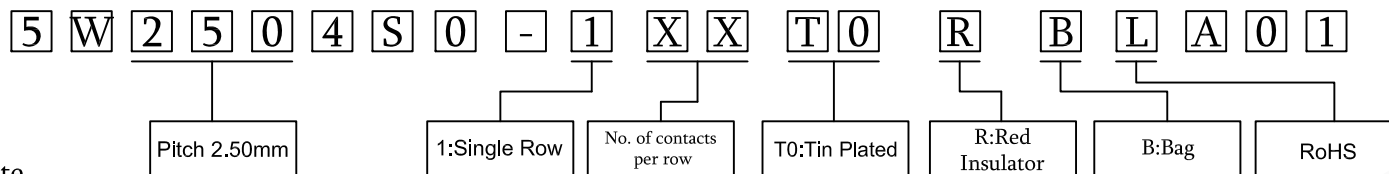


No. of contacts	Dimensions	
	A	B
1x02	2.50	5.00
1x03	5.00	7.50
1x04	7.50	10.00
1x05	10.00	12.50
1x06	12.50	15.00
1x07	15.00	17.50
1x08	17.50	20.00
1x09	20.00	22.50
1x10	22.50	25.00
1x11	25.00	27.50
1x12	27.50	30.00
1x13	30.00	32.50
1x14	32.50	35.00
1x15	35.00	37.50







07P~15P

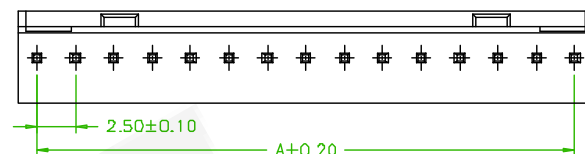

02P,03P



04P~06P

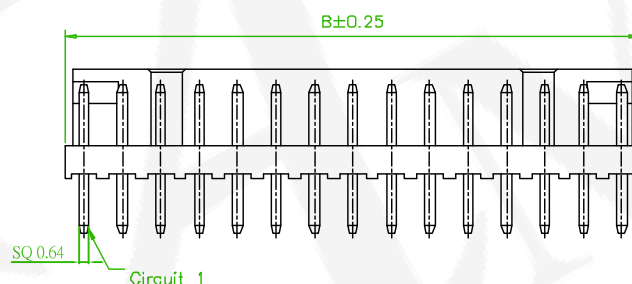

P.C.B LAYOUT

Old Part No.:2504S-XXTR-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2504S0-1XXT0RBLA01				繪圖 DRAWN	Jeff 2016/11/08
	圖號 DRAWING NO.	GW090-JF005	版本 REV.	A	核對 CHECKED	Jenny 2016/11/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/08	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		