


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C 
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute






MATERIAL

Solder Tabs: Brass
 Material:Nylon 66,UL94V-0

ORDER INFORMATION

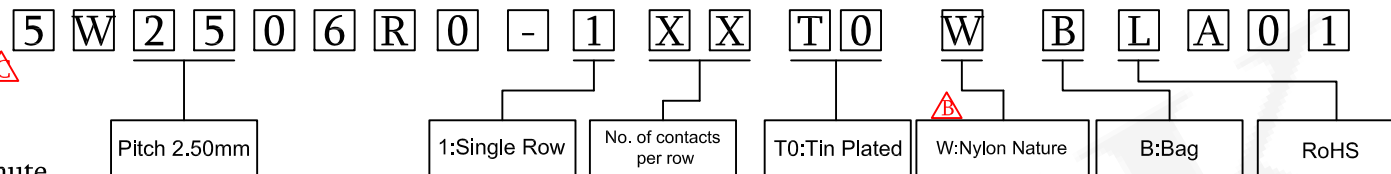

No. of contacts	Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

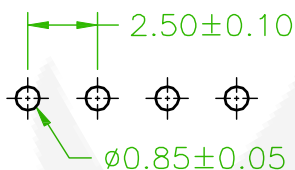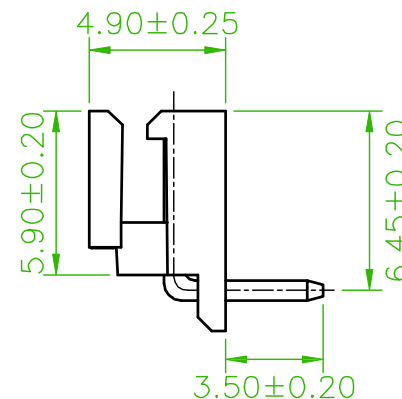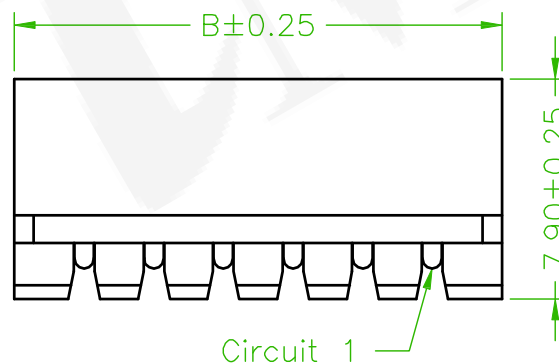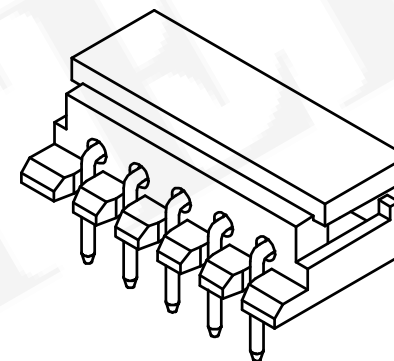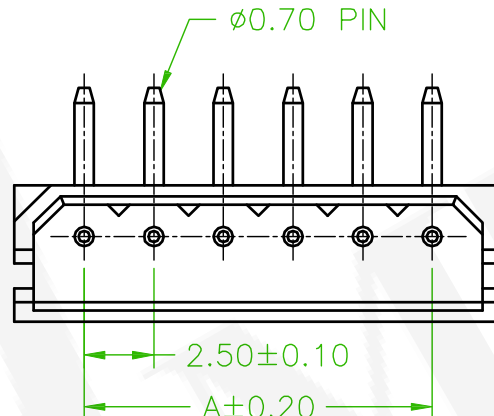

P.C.B LAYOUT

Old Part No.:2506R-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	Revised the Temperature Range	Nick	2019/09/06
 x1	ECN No.:170908, Revised the Color	Kilin	2017/09/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-22
--