

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min


Withstanding Voltage: 1000V AC/minute

MATERIAL




Pin Material: Brass

Material:PBT,UL94V-0


ORDER INFORMATION

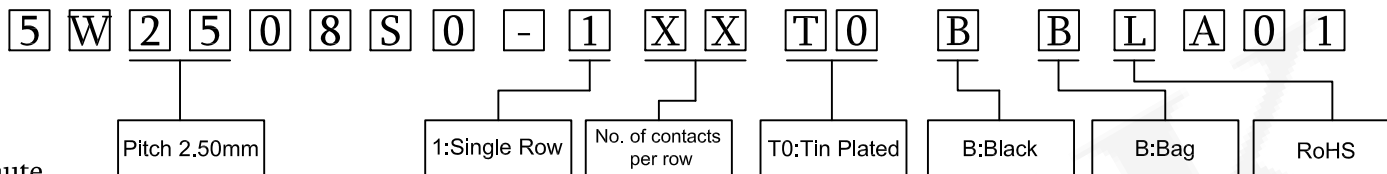

No. of contacts	Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

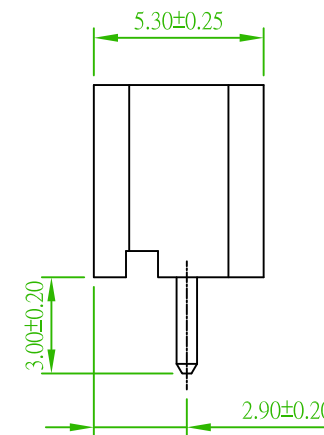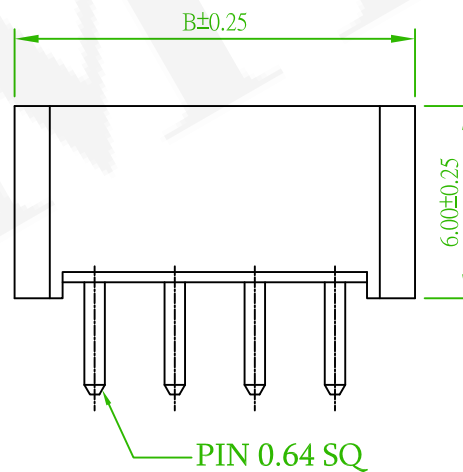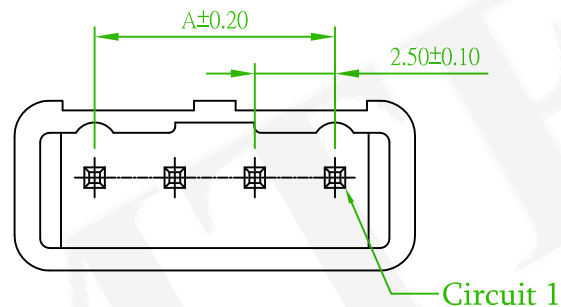

Old Part No.:2508S-XXTB-L

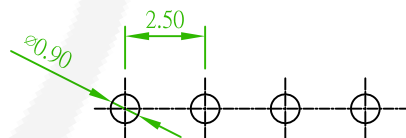

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER STRAIGHT TYPE				頁數 Page	1/1
	品號 PART NO.	5W2508S0-1XXT0BBLA01				繪圖 DRAWN	Kent 2007/04/17
	圖號 DRAWING NO.	GW090-EL071	版本 REV.	A	核對 CHECKED	Paul 2007/04/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/04/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	