

Specifications

Current Rating: 3 A Max.

Voltage Rating: 250V AC,DC

Temperature Range: -40°C to +105°C

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 W 2 5 1 0 S 0 - 1 X X T 0 W B L C 0 1

Pitch 2.50mm

1:Single Row

No. of contacts
per row

T0:Tin Plated




W:White

B:Bag Package

RoHS



No. of contacts	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

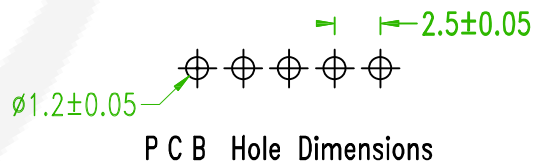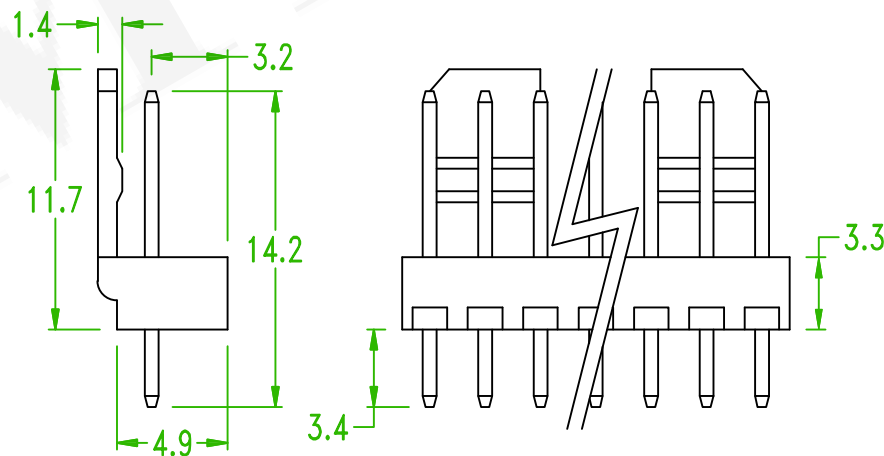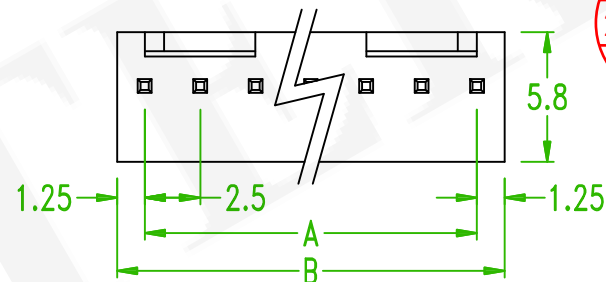

Old P/N:2510S-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2510S0-1XXT0WBLC01				繪圖 DRAWN	Jeff 2016/11/08
	圖號 DRAWING NO.	GW083-JF008	版本 REV.	A	核對 CHECKED	Johnny 2016/11/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/08	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		