

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

MATERIAL

Pin Material: Brass

Material: Nylon 66, UL94V-0

ORDER INFORMATION

5 W 2 5 1 7 R 0 - 1 X X T 0 W B L B 0 1

Pitch 2.50mm

1: Single Row

No. of contacts
per row

T0: Tin Plated





W: White

B: Bag

RoHS




No. of contacts	Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

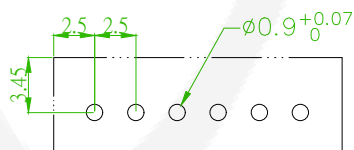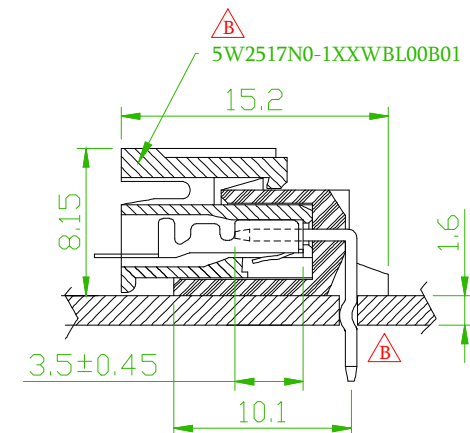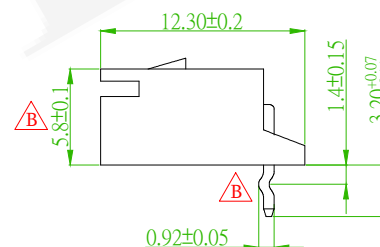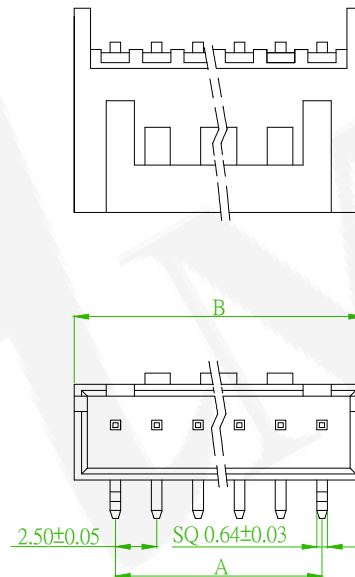

Applicable P.C.B Thickness: 1.6mm

Old Part No.: 2517R-XXTW-L



品名 TITLE	2.5mm WAFER STRAIGHT				頁數 Page	1/1
品號 PART NO.	5W2517R0-1XXT0WBLB01			繪圖 DRAWN	Sam 2009/12/03	
圖號 DRAWING NO.	GW067-EL110	版本 REV.	B	核對 CHECKED	Alex 2009/12/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/12/03	
公差 TOLERANCE	 ± 0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	QEC NO.: 200702 Revise the drawing	Alice	2020/8/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE