

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1000V AC/minute

MATERIAL







Pin Material: Brass

Material:Nylon 66,UL94V-0


ORDER INFORMATION

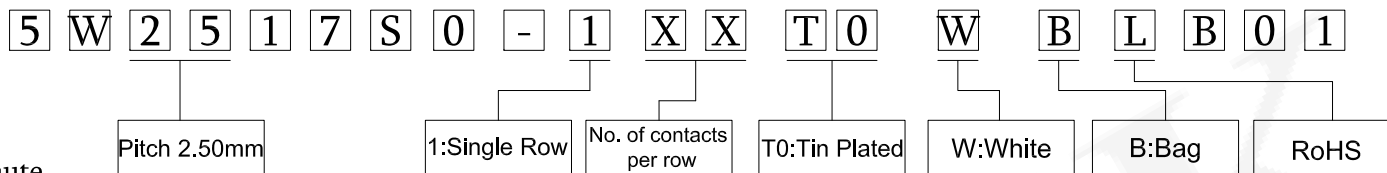

No. of contacts	Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

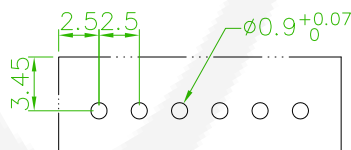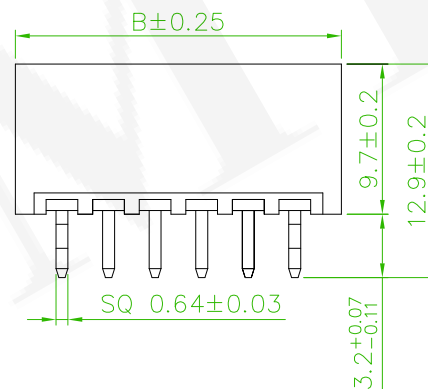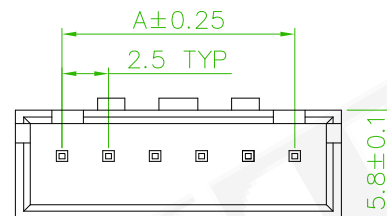

Applicable P.C.B Thickness: 1.6mm



Old Part No.:2517S-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2517S0-1XXT0WBLB01				繪圖 DRAWN	Sam 2009/12/03
	圖號 DRAWING NO.	GW067-EL111	版本 REV.	A	核對 CHECKED	Alex 2009/12/03	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/12/03	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		