

MATERIAL



Contact Pin: Brass

Insulator: Nylon 66, UL94V-0 or UL94V-2





ORDER INFORMATION

5 W 2 5 4 2 R 0 - 1 X X T 0 W B L A X X

1:Single Row	No. of Contacts per Row	T0:Tin Plated	W:Natural	B:Bag	RoHS	01: UL94V-2 02: UL94V-0
--------------	-------------------------	---------------	-----------	-------	------	----------------------------




No. of Contacts	Dimensions(mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

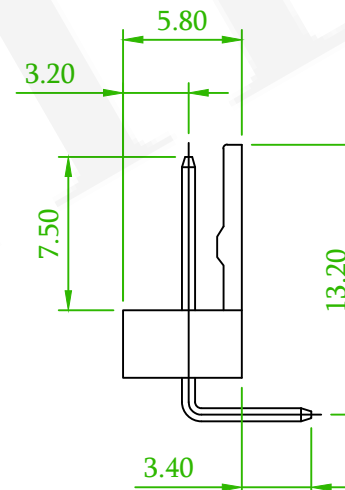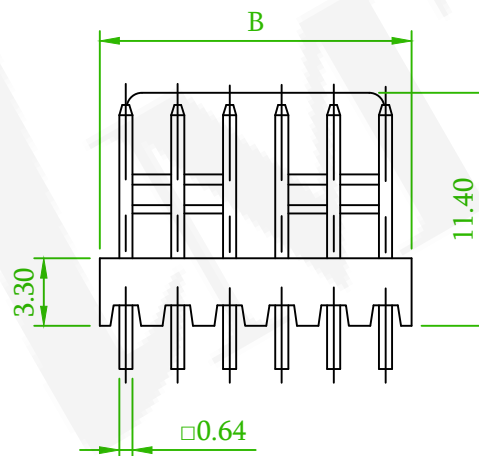

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)



Old Part No.:2542R-XXTW-L



品名 TITLE	2.54mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5W2542R0-1XXT0WBLAXX				繪圖 DRAWN	Sinnys 2010/11/25
圖號 DRAWING NO.	GW090-EL168	版本 REV.	C	核對 CHECKED	Josh 2018/12/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/20	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax1	ECN NO.221121: Revise the specification	Rex	2023/02/14
Bx2	Add an option: UL94V-0.	Gary	2018/12/20