

MATERIAL

Contact Pin: Brass

Insulator: Nylon 66, UL94V-0

ORDER INFORMATION

5 W 2 5 4 2 R 1 - 1 X X T 0 W B L A 0 1

AMTEK 耀德

2023.03.03

Released DCC

1:Single Row

No. of Contacts
per Row(02-20)

T0:Tin Plated

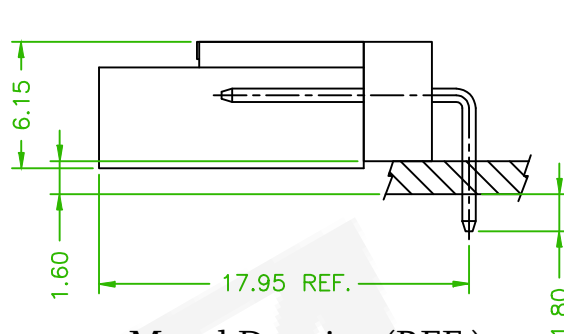
W:Natural

B:Bag


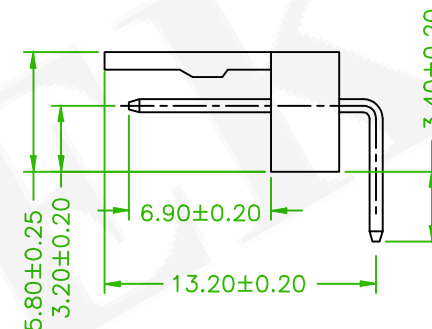
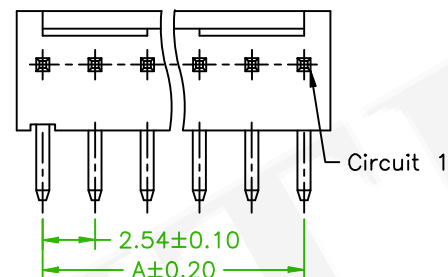

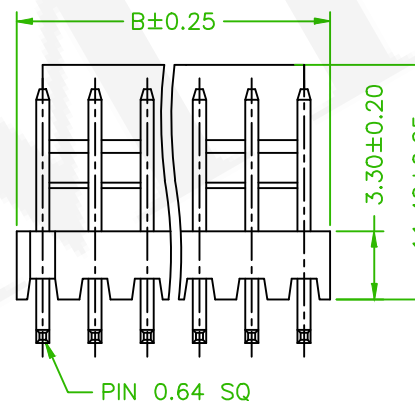
RoHS



Circuit No.	Dimensions	
	A	B
02P	2.54	5.08
03P	5.08	7.62
04P	7.62	10.16
05P	10.16	12.70
06P	12.70	15.24
07P	15.24	17.78
08P	17.78	20.32
09P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48
13P	30.48	33.02
14P	33.02	35.56
15P	35.56	38.10
16P	38.10	40.64
17P	40.64	43.18
18P	43.18	45.72
19P	45.72	48.26
20P	48.26	50.80



Mated Drawing (REF.)

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

品名 TITLE	2.54mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5W2542R1-1XXT0WBLA01			繪圖 DRAWN	Benson 2021/01/08	
圖號 DRAWING NO.	GW090-BN430	版本 REV.	B	核對 CHECKED	Josh 2021/01/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/01/08	
公差 TOLERANCE	.X $\pm$ 0.25 .XX $\pm$ 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.221121: Revise the specification	Rex	2023/02/14
	ECN NO. OR DESCRIPTION	REVISED	DATE