

MATERIAL

Solder Tabs: Brass
Contact Pin: Nylon 66,
UL94V-2orUL94V-0

ORDER INFORMATION

5 W 2 5 4 2 S 0 - 1 X X T 0 W B L A X X

1:Single Row

No. of Contacts
per Row

T0:Tin Plated


W:Natural

B:Bag




RoHS

01:UL94V-2
02:UL94V-0

No. of contacts	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

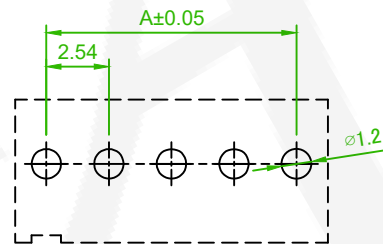

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

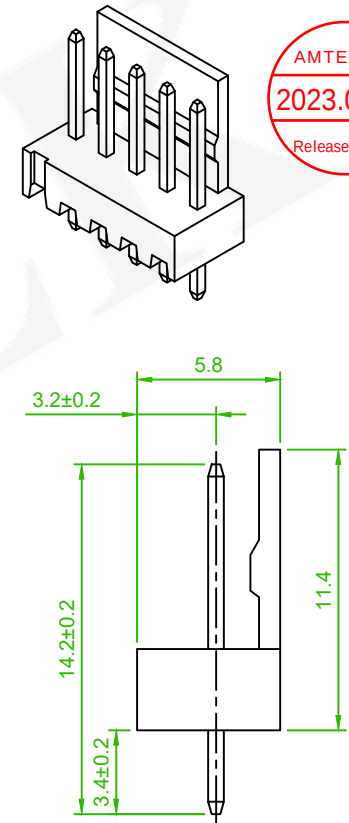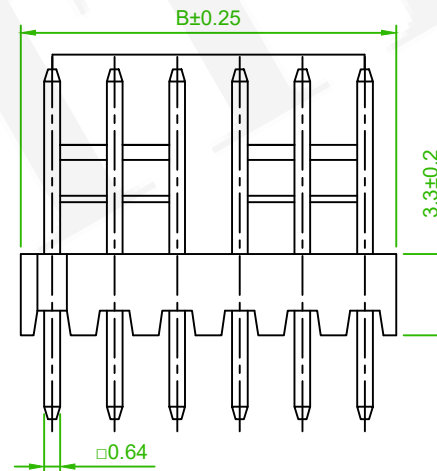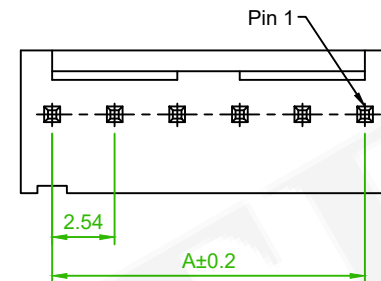

REV.	ECN NO.221121: Revise the specification	Rex	2023/02/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm WAFER S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5W2542S0-1XXT0WBLAXX				繪圖 DRAWN	Nick 2019/11/08
圖號 DRAWING NO.	GW090-NI502	版本 REV.	B	核對 CHECKED	Josh 2019/11/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		